




MALTA DYNAMICS

Tool Lanyard INSTRUCTION MANUAL

These instructions apply to the following model(s):

C1006 - Tool Lanyard

Manual Revision Code:
MD-TLUIM - 02-02-19

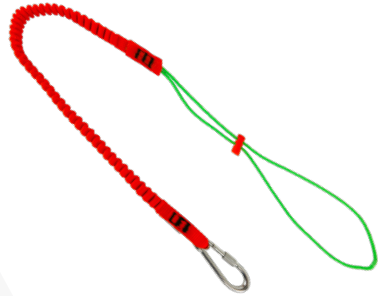

A copy of this manual must be available to users at all times. Visit www.MaltaDynamics.com for the latest user instruction manual based upon date of manufacture.

TABLE OF CONTENTS

Under Penalty of Law -----	1
Materials and Construction -----	2
Instructions for Use -----	2
Performance -----	3
Limitations for Use -----	3
Inspection and Maintenance -----	3
Inspection Log -----	4
Warranty -----	4

UNDER PENALTY OF LAW

NOTE: This *User Instruction Manual* is not to be removed except by the user of this equipment. Current *User Instruction Manuals* must always be available to the user. Read and understand these instructions before using equipment. *Do not discard these instructions.*



WARNING

Misuse or failure to follow warnings, instructions and limitations on the use of this equipment may result in serious personal injury or death. For further instructions about proper use, refer to supervisor or contact Malta Dynamics at 1-800-494-1840.



INSTRUCTIONS FOR USE

WARNING

Do not alter or intentionally misuse this equipment.
Maximum Capacity: 15 lbs.

Step 1: Pull rope loop end through applicable tool.

Step 2: Pull carabiner end through rope loop, and cinch lanyard tight around tool. NEVER attach tools in any other fashion. NEVER tie knots in Malta Dynamics Tool Lanyards.



Step 3: Attach carabiner to compatible harness work belt, tool belt, or lanyard keeper. Carabiner gate must be fully closed.

Step 4: Ensure that the tool lanyard or connected tool will not disconnect.

Step 5: Always take extreme caution when working near or operating machinery.

WARNING

This product is not to be used as a fall protection connecting device. Never attempt to use this product to tie yourself off to a fall protection anchorage. Do NOT tie in knots. Do NOT connect multiple tool lanyards to each other.

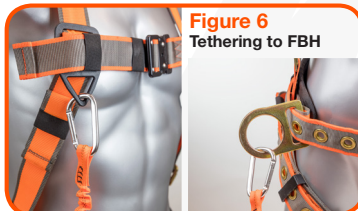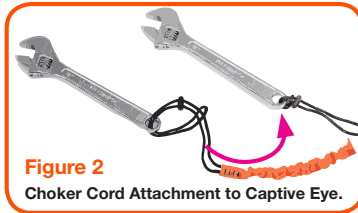

MATERIALS AND CONSTRUCTION

This product is manufactured in strict adherence to Malta Dynamics quality standards and ANSI / ISEA 121-2018 using materials as stated below:

- **Webbing:** Polyester, 1/2" Diameter
- **Chocking Cord:** Polyester
- **Cord-Lock:** Nylon-6
- **Carabiner:** Aluminum Alloy
- **Length w/ Carabiner:** 32"

PERFORMANCE

Malta Dynamics Tool Lanyards are available in a variety of configurations and capacities. This Instruction Manual outlines the use, inspection, and maintenance of all Malta Dynamics' Tool and Wrist Lanyard Models. The following table lists each model by model number, description, and maximum capacity. Never tether any tool or equipment that exceeds the stated maximum capacity outlined on the product label.

Model/ Part #	Description	Max. Capacity	Self- Tether
C1006	Standard Duty Tool Lanyard	15 lbs.	Yes

LIMITATIONS FOR USE

WARNING

Do not use this equipment if you are unable to tolerate the impact of a fall arrest. Age and fitness can seriously affect your ability to withstand a fall. Consult with a physician if in doubt. Minors, pregnant women, and anyone with a history of back and/or neck problems must not use this equipment.

WARNING

Use caution when employing this equipment around machines, electrical hazards, chemical hazards, sharp edges, or abrasive surfaces. Contact may cause equipment failure, personal injury, or death.

INSPECTION AND MAINTENANCE

This product must be inspected before each use and at least twice annually by a competent person.

- Inspect Tool Lanyard for cuts, tears, fraying, loose stitching, or other signs of wear and tear.
- Inspect cord-lock and carabiner for correct mechanical function, and check for cracks, dents, or bent parts.
- Check all parts for heavy soil or residue build-up, such as paint, oil, grease, and other substances.
- Discard and replace immediately if there is any sign of damage, defect, contamination, or excessive wear. This product can be cleaned using a damp rag soaked in a mild soap and water solution. Hang up and allow to air-dry. Store in a cool, dry location. Do not attempt to modify, repair or alter in anyway.



INSPECTION LOG

Date of Manufacture: _____ Model Name/#: _____
Serial: _____ Date of First Use: _____

Inspection Date	Items Noted	Corrective Action	Approved By

WARRANTY

THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Equipment offered by Malta Dynamics is warranted against factory defects in workmanship and materials for a period of one year from date of installation or first use by the original owner. LIMITED REMEDY: Upon notice in writing, Malta Dynamics will repair or replace all defective items at Malta Dynamics's sole discretion. Malta Dynamics reserves the right to require that the defective item be returned to its plant for inspection before determining the appropriate course of action. Warranty does not cover equipment damage resulting from wear, abuse, damage in transit, failure to maintain the product or other damage beyond the control of Malta Dynamics. Malta Dynamics shall be the sole judge of product condition and warranty options. This warranty applies only to original purchaser and is the only warranty applicable to this product. Please contact Malta Dynamics customer service department at 800-494-1840 for assistance. LIMITATION OF LIABILITY: IN NO EVENT WILL MALTA DYNAMICS BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES INCLUDING, BUT NOT LIMITED TO LOSS OF PROFITS, IN ANY WAY RELATED TO THE PRODUCTS REGARDLESS OF THE LEGAL THEORY ASSERTED.



MALTA DYNAMICS

800-494-1840
MaltaDynamics.com
210 13th Street
Malta, OH 43758 USA