

LED Wall Pack Installation Instructions



**THIS INSTALL MANUAL IS APPLICABLE FOR
MODEL NO : WPLL-20T40W/WPLL-40T60W/WPLL-40T80W/WPLL-60T100W/WPLL-80T120W**

SAFETY INFORMATION

IMPORTANT

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE NATIONAL ELECTRICAL CODE AND LOCAL BUILDING CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

PRECAUTIONS

- Please read and understand this entire manual before attempting to assemble, install, or operate this light fixture.
- This light fixture requires a 120-277VAC or 277- 480VAC power source.
- Some codes require installation by a qualified electrician.
- This light fixture must be properly grounded.
- Make sure connections are secure using wire nuts, crimp-on lugs or other approved connecting devices.



WARNING: Turn the power off at the circuit breaker or fuse. Place tape over the circuit breaker switch and verify power is off at the light fixture.



CAUTION: Burn hazard. Allow the light fixture to cool before touching.



NOTICE: If using dimming function, only connect to 0-10V approved dimming switches or control system



NOTICE: FCC Regulations state that any unauthorized changes or modifications to this equipment not expressly approved by the manufacturer could void the user's authorization to operate this equipment.




INFORMATION: The device is tested and found to comply with Part 15 of the FCC Rules. Operation is subject to two conditions: (1) This device may not cause harmful interference and, (2) this device must accept any interference received, including any interference that may cause undesired operation. These limits are designed to provide reasonable protections against harmful interference when the equipment is operated in a commercial environment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

General Wiring Diagram

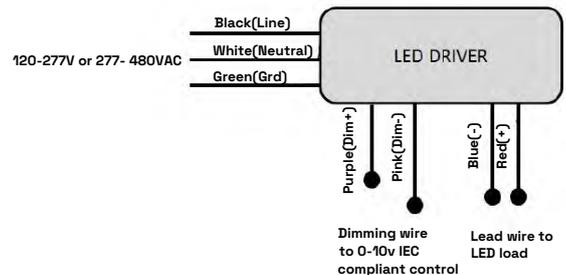

NOTICE: Green ground screw provided in proper location. Do not relocate.

NOTICE: Minimum 90° supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp location,

Contact us : For support & assistance, please feel free to contact us below.

E-Mail: info@medinahpower.com | **Web:** www.medinahpower.com | **Ph:** +1 (844) 870-5337

LED Wall Pack

Installation Instructions



CAUTIONS:

1. Do not use an electric generator to test the LED fixture.
2. Please abide by related country, regional and local law and regulations when installing this fixture;
3. Do not install the fixture in raining days to avoid electrical shock or damage.


NOTICE:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.
4. Please use listed water proof strain relief bushing when connecting the supply cord to the outlet box.


ATTENTION:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge;
2. Please wear gloves to avoid injury before installation;
3. If at some point during or after installation you should notice smoke or fire coming from the fixture, turn the power off immediately and notify an electrician.
4. This fixture is available for outdoor use. The recommended minimum distance from the fixture to ground is 2 meters.


INSTALLATION




1. Turn power off.

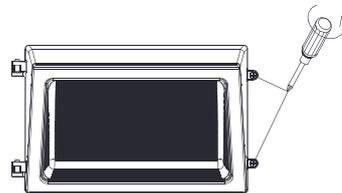

2. Use a screwdriver to remove the screws on both sides.

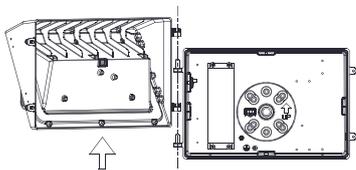

3. Open the fixture, disconnect the connection terminals, and remove the upper cover from the fixture

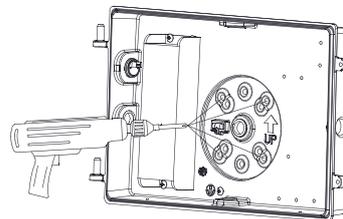


4. Drill through the mounting hole with an electric drill.


LED Wall Pack Installation Instructions




INSTALLATION

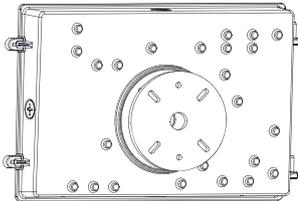


5. Attach EVA cotton pad to bottom shell.

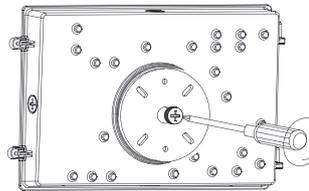


6.1.1 Use a screwdriver to remove the plug

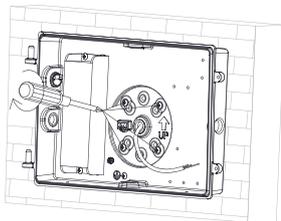


6.1.2 Lock the bottom shell on the mounting seat with screws.

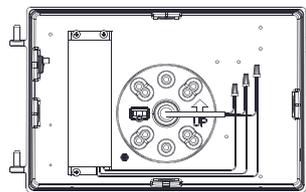


6.1.3 L, N and G wires connected to the power supply.

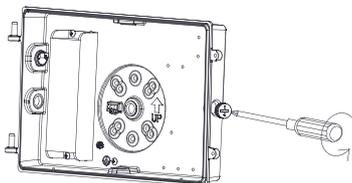


6.2.1 Use a screwdriver to remove the plug

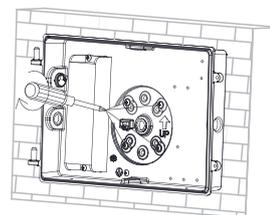

6.2.2 Lock the bottom shell on the mounting seat with screws.

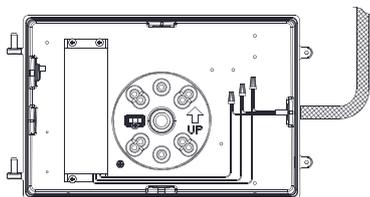

6.2.3 L, N and G wires connected to the power supply.

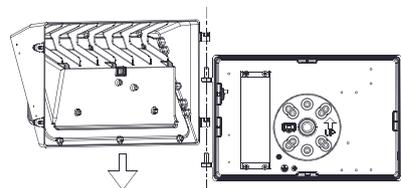


7. Install the cover of the fixture and connect the terminals.


LED Wall Pack Installation Instructions



INSTALLATION

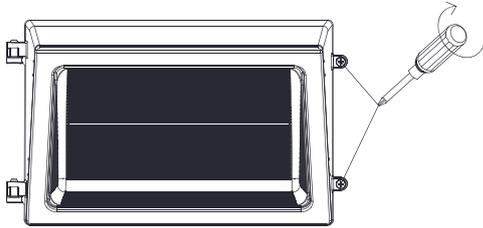

8. Install the cover of the fixture and connect the terminals.

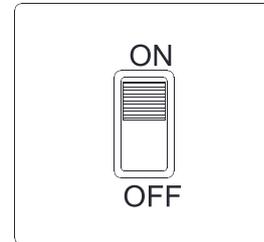


9. Make sure the installation is complete before turning power back on.

STANDARD WIRE:

L/live wire: Black\Brown; N/null wire: White\Blue; Ground wire: Green\Yellow-green.

Warning: During grounding, make sure the earth wire of the driver and fixture housing are connected together with the earth wire of the local power supply.


SPECIAL FUNCTIONS INSTRUCTION:

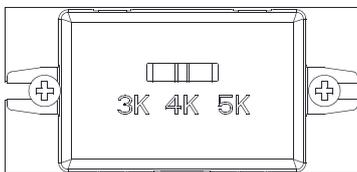

COLOR TEMPERATURE ADJUSTABLE INSTRUCTION

- 1, The color temperature of the lamp turns to 3000K when the DIP switch is set to 3K,
- 2, The color temperature of the lamp turns to 4000K when the DIP switch is set to 4K,
- 3, The color temperature of the lamp turns to 5000K when the DIP switch is set to 5K,

Note: Please turn off the power before adjusting the color temperature.

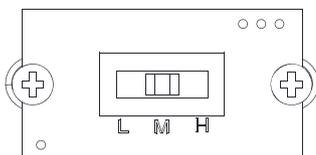

WATTAGE ADJUSTABLE INSTRUCTION

The power of the lamp will change to the corresponding wattage when the DIP switch is set to L/M/H.
Adjustable wattage range: 25%-100%.

Note: Please turn off the power before adjusting the wattage.

LED Wall Pack

Installation Instructions

INSTALLATION

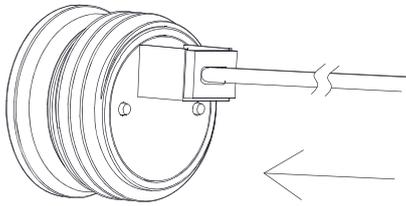


Fig: 1

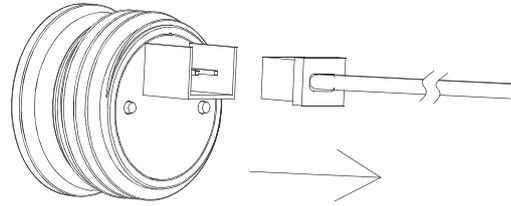


Fig: 2

PHOTOCELL:

Connection of male and female connector will help to turn on the photocell.(Fig:1)

Disconnection of male and female connector will help to turn off the photocell.(Fig:2)