


Air Atomizing Spray Nozzles

Internal Mix Deflected Flat Fan Pattern - 1/4 NPT



Model: AD1010SS
Material: Type 303 Stainless Steel


Model AD1010SS

1/4 NPT internal mix deflected flat fan nozzles are designed for applications where space is at a premium. The flat fan pattern sprays at a right angle to the nozzle's orientation, allowing spray to be placed precisely where it's needed in close quarters. These nozzles are ideal for coating the inside of enclosures and ductwork.

For pressure fed applications not requiring independent air and liquid control.




A Model AD1010SS is used to apply a protective coating to wood panels.

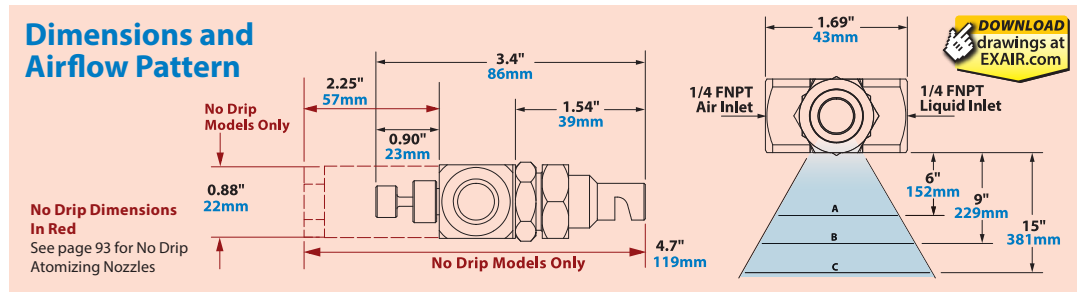

Spray Nozzles

Model	10 PSI/0.7 BAR Liquid				20 PSI/1.4 BAR Liquid				30 PSI/2.1 BAR Liquid				40 PSI/2.8 BAR Liquid				60 PSI/4.1 BAR Liquid				Spray Dimensions			Max. Depth in/cm																																																																																				
	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM		Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM		Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM		Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM		Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Pressure Air PSI/ BAR	Liquid PSI/BAR	Width A in cm	B in cm		C in cm																																																																																			
	AD1010SS	6	0.4	3.0	11.5	1.4	41	14	1.0	4.0	15.1	2.3	66	22	1.5	4.6	17.6	3.2	90	26	1.8	5.7	21.4		3.5	98	38	2.6	6.9	26.0	4.7	133	54	3.7	5.3	20.1	6.6	188	62	4.3	4.6	17.3	7.8	221	70	4.8	3.1	11.9	9.1	258	12	0.8	10	0.7	9	23	14	36	16	41	36	91	22	1.5	20	1.4	11	28	13	33	16	41	42	107	34	2.3	30	2.1	8	20	12	30	16	41	45	114	46	3.2	40	2.8	9	23	12	30	15	38	48	122	70	4.8	60	4.1	12	30	15	38	18	46

Internal Mix 360° Hollow Circular Pattern - 1/4 NPT



Model: AT1010SS
Material: Type 303 Stainless Steel


Model AT1010SS

1/4 NPT internal mix 360° nozzles are designed for applications where the spray pattern must be oriented away from the nozzle in all directions. 360° nozzles are ideal where a smooth, even coating is needed on the ID of pipe or similar ductwork. They also work great for operations where a mist over a broad area is needed, such as dust suppression, humidification and cooling.

For pressure fed applications not requiring independent air and liquid control.



This 360° circular pattern nozzle can be used to coat inside diameters or cover a broad area over 4' (1219mm).

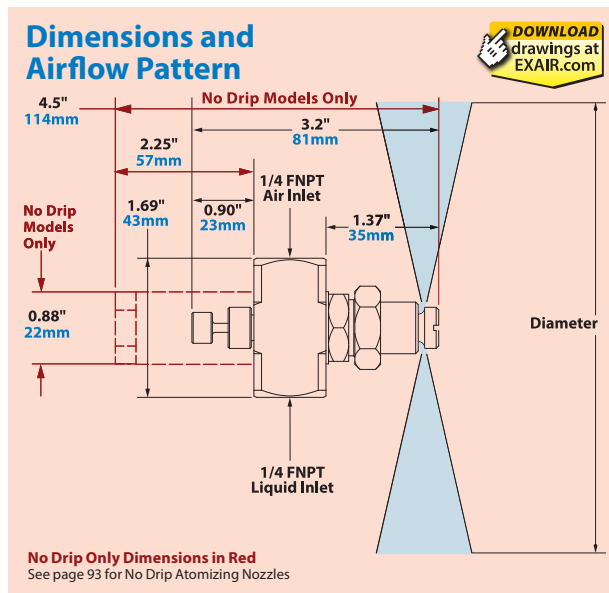

Model	10 PSI/0.7 BAR Liquid				20 PSI/1.4 BAR Liquid				30 PSI/2.1 BAR Liquid				40 PSI/2.8 BAR Liquid				60 PSI/4.1 BAR Liquid				Spray Dimensions																																																									
	Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM		Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM		Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM		Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM		Air Pressure PSI/BAR	GPH/ LPH	SCFM/ SLPM	Pressure Air PSI/ BAR	Liquid PSI/BAR	Diameter in cm																																																								
	AT1010SS	20	1.4	4.5	16.8	4.3	121	34	2.3	7.3	27.5	6.4	182	50	3.4	8.1	30.6	8.9	251	60	4.1	11.5	43.5	10.0	283	85	5.9	14.7	55.7	13.3	376	90	6.2	12.7	47.9	14.1	398	95	6.6	10.6	40.2	14.9	423	100	6.9	8.9	33.7	15.8	449	20	1.4	10	0.7	36	91	34	2.3	20	1.4	39	99	50	3.4	30	2.1	44	112	60	4.1	40	2.8	49	124	85	5.9	60	4.1	53



No Drip Air Atomizing Spray Nozzles



No Drip Air Atomizing Spray Nozzles



Eliminate drips to conserve valuable liquids and improve product finishes!

What Are No Drip Atomizing Nozzles?

EXAIR's patented† no drip atomizing spray nozzles work in the same way our standard atomizing nozzles do, but have the added benefit of positively stopping liquid flow when compressed air is shut off. All models use stainless steel construction for durability and corrosion resistance.

EXAIR's no drip atomizing nozzles are available in 3 basic families:

Internal Mix:

Internal mix nozzles mix the liquid and air inside the air cap and produce the finest atomization. Internal mix nozzles can be used on liquids with a viscosity up to 300 cP. Both air and liquid sides are pressure fed. **No Drip Internal Mix Atomizing Nozzles are for pressure fed applications not requiring independent air and liquid control.**

External Mix:

External mix nozzles have the highest flow rates and allow the air and liquid flows to be adjusted independently. These nozzles are best where precise liquid flow is needed. External mix nozzles can be used on liquids with a viscosity above 300 cP. Both air and liquid sides are pressure fed. **No Drip External Mix Atomizing Nozzles are for pressure fed applications with independent air and liquid control.**

Siphon Fed:

Siphon fed nozzles require no liquid pressure and can be used with gravity fed liquids or lift liquids from a siphon height as much as 36 inches (91cm). Siphon fed nozzles can be used on liquids with a viscosity up to 200 cP. **No Drip Siphon Fed Atomizing Nozzles are siphon or gravity fed for non-pressurized applications.**

† Patent #9156045

Why No Drip Atomizing Nozzles?

When spraying any type of liquid, post-spray liquid flow can cause big problems. Unwanted drips can ruin product finishes on painted or coated surfaces. In addition, excess liquid flow wastes precious resources such as expensive coatings, chemicals or water. EXAIR's no drip atomizing nozzles are ideal where no post-spray drip is permissible. When the compressed air supply is shut off, the no drip nozzle positively seals off the flow of liquid eliminating the possibility of drips. They can be used in any situation that our standard atomizing nozzles can be used, including Siphon Fed applications. Unlike some manufacturers, there's no need to run a separate air line to control the no drip mechanism. The same compressed air used to combine and atomize liquid in a variety of patterns is used to open a valve allowing liquid to flow. That makes these ideal for use with EXAIR's money and energy saving EFC (see page 7).

EXAIR's no drip nozzles do not change flow rates from standard atomizing nozzles. Operations that require up to 180 cycles per minute can be achieved. Minimum operating air pressure of 30 PSIG (2.1 BAR) required for 1/4 and 1/2 NPT nozzles. 20 PSIG (1.4 BAR) is required for 1/8 NPT nozzles.



Mounting Brackets are available - Model 901786 for 1/8 NPT, Model 901318 for 1/4 NPT and Model 901556 for 1/2 NPT atomizing nozzles.



Applications

- Painting
- Coating
- Rinsing
- Cooling
- Quenching
- Wetting (moistening)
- Humidification
- Dust Control

Advantages

- No post spray drip
- Adjustable
- Easily used with an EFC
- Minimizes air and liquid consumption
- All stainless steel construction
- Fine atomization
- Interchangeable liquid and air caps
- Compact