


LED Area Lights

Project: _____ Location: _____
 Date: _____ Part #: _____
 Notes: _____



Performance & Features

LED Source

- 4000K CCT
- CRI >70
- L70 lifespan of 50,000 hours
- 0-10V Dimming
- 120V-277V input voltage

Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze finish available
- Wet location rated
- Clear lens
- Operates efficiently in temperatures from -40°F to 122°F
- Slip-Fitter Mount & Direct Arm Mount

Certifications and Warranty

- UL Listed
- Backed by a 5-year limited warranty

SKU Guide

Example: GRD32-PC-4K-BZ


Family	Wattage	Control	CCT	Finish
GRD	32 = 32W 64 = 64W 100 = 100W 150 = 150W	PC = Photocell	4K = 4000K	BZ = Bronze

Specification


Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
GRD32-PC-4K-BZ	32W	4500	4000K	139	Bronze
GRD64-PC-4K-BZ	64W	8500	4000K	140	Bronze
GRD100-PC-4K-BZ	100W	14,000	4000K	133	Bronze
GRD150-PC-4K-BZ	150W	20,000	4000K	140	Bronze

Dimensions


GRD32-PC-4K-BZ

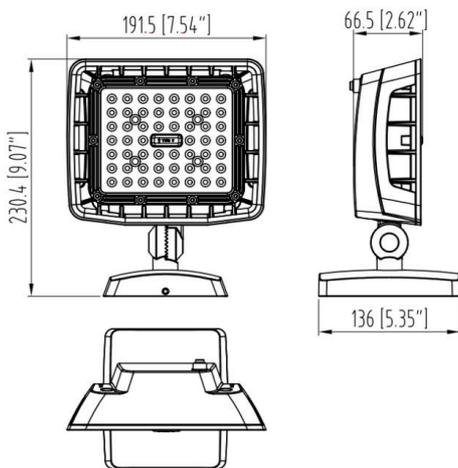


GRD64-PC-4K-BZ

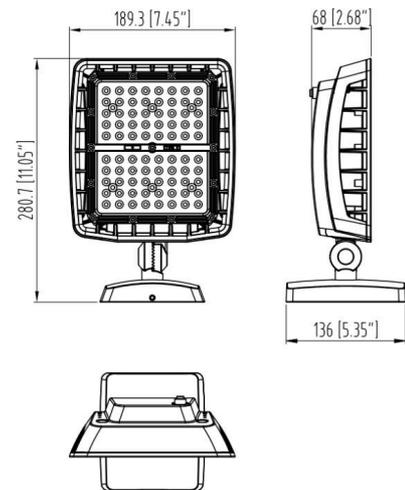

GRD100-PC-4K-BZ

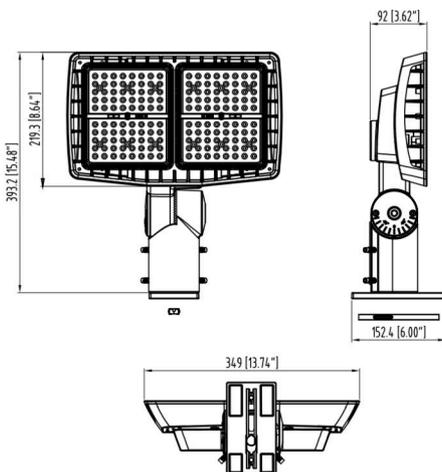

GRD150-PC-4K-BZ

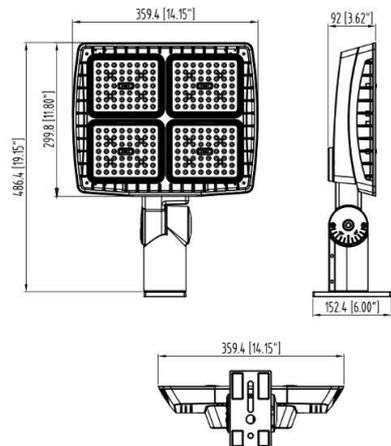


Packaging Dimensions

SKU#	Master Carton	Qty
GRD32-PC-4K-BZ	7.4 x 9.35 x 5.75-in.	4
GRD64-PC-4K-BZ	5.75 x 9.35 x 5.75-in.	2
GRD100-PC-4K-BZ	15.87 x 5.77 x 15.87-in.	2
GRD150-PC-4K-BZ	16.34 x 5.81 x 16.34-in.	2

Photometry

GRD100-PC-4K-BZ

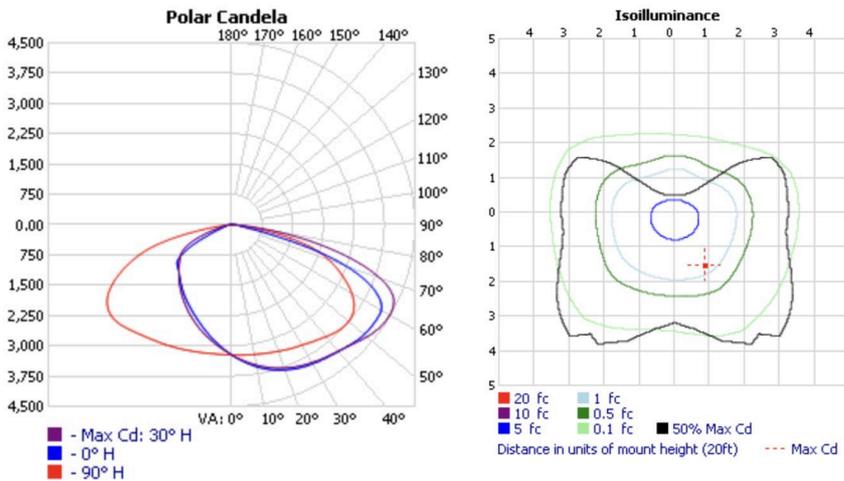

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,710.8	18.5%	18.5%
0-40	4,723.4	32.2%	32.2%
0-60	10,084.6	68.7%	68.7%
60-90	4,593.6	31.3%	31.3%
70-100	1,870.7	12.7%	12.7%
90-120	2.1	0%	0%
0-90	14,678.2	99.9%	99.9%
90-180	7.8	0.1%	0.1%
0-180	14,686.0	100%	100%

Note: Additional Photometry available on request