


Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

LED Source

- 15W & 28W: 5-CCT Color Selectable with Remote Control (2700K/3000K/3500K/4000K/5000K)
- 50W & 80W: 4000K
- CRI >80
- Wattage: 15 to 80 Watts
- 120V Input
- Flicker-free performance

Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze and white finishes available
- Wet Location Rated
- Operates efficiently in temperatures from -40°F to 122°F
- 50W & 80W models come with integral photocell
- Mounting Options: Knuckle mount & wall mount bracket included

Certifications and Warranty

- ETL Listed
- FCC compliant
- Backed by a 5-year limited warranty

SKU Guide


Example: FSNX15-5CCT-BZ

| Family | Wattage | Controls | CCT | Finish |
|--------|--|------------------------------------|---|---------------------------|
| FSNX | 15 = 15W 28 = 28W 50 = 50W 80 = 80W | PC = Photocell (50W/80W Models) | 5 CCT = 2700K 3000K 3500K 4000K 5000K 4K = 4000K | BZ = Bronze WH = White |

Quick Order

| Model No. | Power (W) | Lumens (lm) | CCT (K) | LPW | Finish |
|----------------------------------|-----------|-------------|---------------------|-----|--------------|
| FSNX15-5CCT-BZ FSNX15-5CCT-WH | 15W | 1600 | 27K/30K/35K/40K/50K | 107 | Bronze/White |
| FSNX28-5CCT-BZ FSNX28-5CCT-WH | 28W | 3000 | 27K/30K/35K/40K/50K | 107 | Bronze/White |
| FSNX50-PC-4K-BZ | 50W | 5000 | 4000K | 100 | Bronze |
| FSNX80-PC-4K-BZ | 80W | 8000 | 4000K | 100 | Bronze |

Dimensions




| | FSNX15 | FSNX28 | FSNX50 | FSNX80 |
|----------|--------|--------|--------|---------|
| A | 7.7 in | 8.7 in | 9.9 in | 11.0 in |
| B | 4.4 in | 4.8 in | 5.8 in | 6.3 in |
| C | 1.3 in | 1.4 in | 1.6 in | 2.0 in |

Packaging Dimensions

| SKU# | Master Box | Qty |
|-------------------|-----------------------|-----|
| FSNX15-5CCT-BZ/WH | 12.6 x 9.8 x 8.6 in | 4 |
| FSNX28-5CCT-BZ/WH | 12.5 x 10.9 x 9.2 in | 4 |
| FSNX50-PC-4K-BZ | 13.3 x 12.1 x 10.0 in | 4 |
| FSNX80-PC-4K-BZ | 14.1 x 13.2 x 10.6 in | 4 |

Photometry

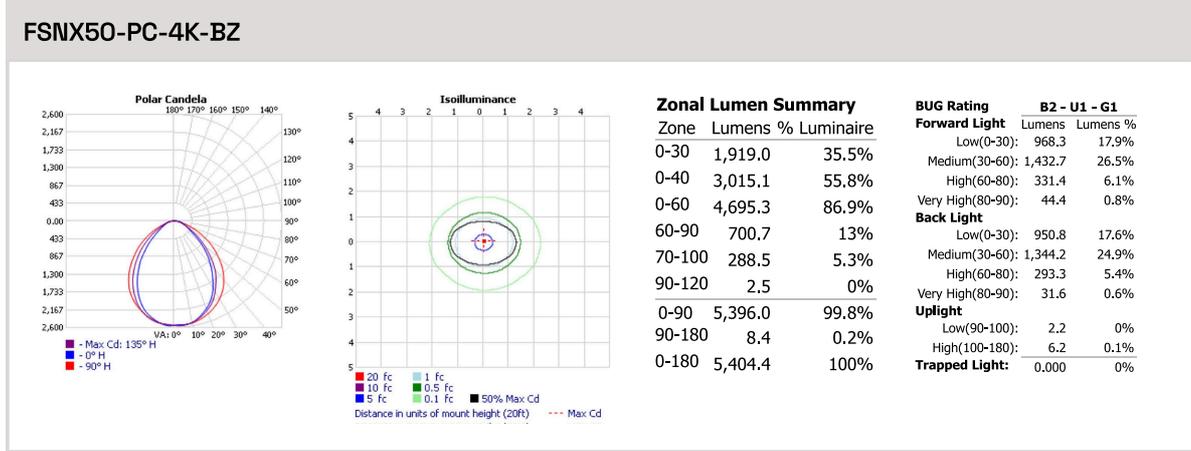

Note: Additional photometry available on request.