

LED Solar Area Light

Project: _____ Location: _____
 Date: _____ Part #: _____
 Notes: _____



Performance & Features

LED Source

- Lumileds SMD2835 with Single CCT 5000K
- CRI >70
- 20%-100% dimmable driver
- Radar Sensor with photocell tech

Construction

- Highly durable die-cast aluminum, long lasting dark black finish
- Wet Location Rated
- Clear Prismatic Lens
- 8 hours charging time
- Operates efficiently in temperatures from -4°F to 104°F
- >1200 battery cycles

Certifications and Warranty

- UL Listed
- Backed by a 3-year limited warranty

SKU Guide

Example: SRON8-5K-BK


Family	Output	CCT	Finish
SRON	8 = 7W 12 = 10W	50K = 5000K	BZ= Bronze

Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Battery Spec(Li-on)	Solar Panel
SRON8-5K-BZ	7W	840LM	5000K	120	3.2V 12000 mAh	10W 6V
SRON12-5K-BZ	10W	1200LM	5000K	120	3.2V 24000 mAh	17W 6V

Contact for custom configuration & specifications

Dimensions

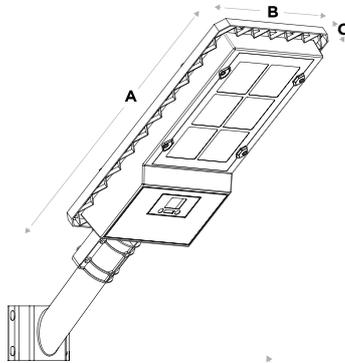

SRON8-5K-BZ		SRON12-5K-BZ	
A	19.3 in	A	22.0 in
B	9.2 in	B	10.4 in
C	2.8 in	C	2.8 in


Modes of Operation

5 modes of operation:

- 3 Hr mode
- 5 Hr mode
- 8 Hr Mode
- Motion-only mode
- Auto IC timer mode

MODES OF OPERATION

(Operate at maximum of 25ft from the fixture)

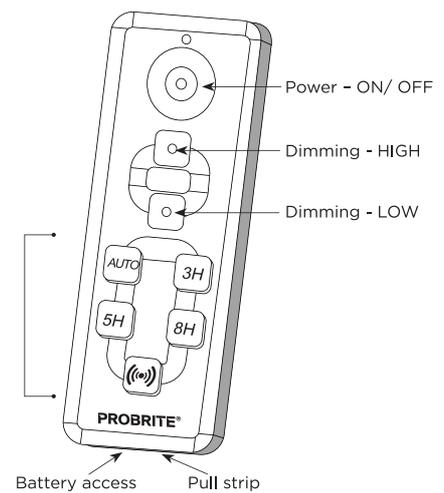

Packaging Dimensions

SKU#	Master Carton	Qty
SRON8-5K-BZ	21.3 x 16.5 x 15.9 in	4
SRON12-5K-BZ	26.8 x 16.4 x 17.6 in	4