

Linear LED Strip Retrofit Kit 3 CCT Selectable

Project: _____ Location: _____
 Date: _____ Part #: _____
 Notes: _____



Performance & Features

Product Highlights

High lighting efficiency of 130lm/W with a color rendering index (Ra) greater than 80.

Features a 0-10V dimmable driver compatible with AC120-277V.

Reduces energy consumption by up to 60%.

Suitable for damp locations, ensuring versatility in various environments.

UL and DLC listed, backed by a 5-year warranty for quality and reliability.

Operating temperature range: -4°F to 104°F.

Storage temperature range: -22°F to 140°F.

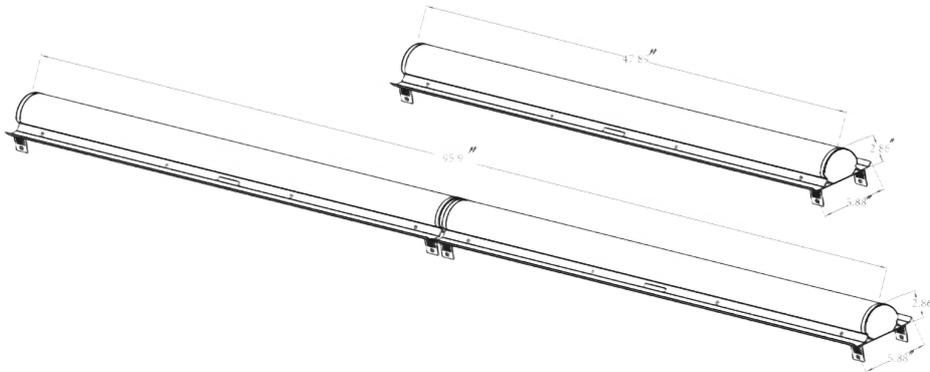
Quick Order

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
4FT RSTR4-20T40W-CCT-DV2-F-WH	20W/30W/40W	2600/ 3900/ 5200 lumens	35K/40K/50K	130 LPW	White

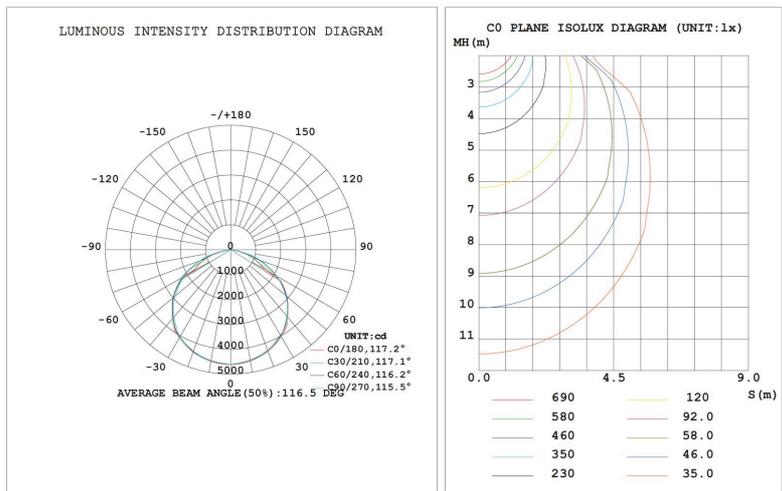
Contact for custom configuration & specifications

Dimensions

RSTR4-20T40W-CCT-DV2-F-WH - 47.89"x5.88"x2.86"

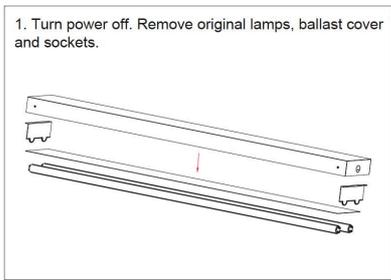


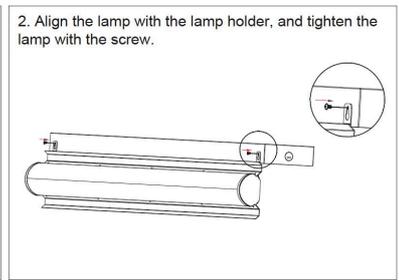
Photometry

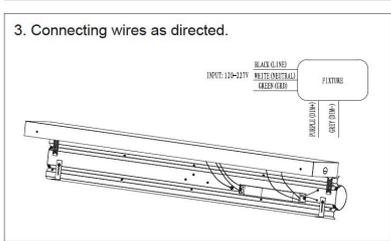


Installation

1. Turn power off. Remove original lamps, ballast cover and sockets.


2. Align the lamp with the lamp holder, and tighten the lamp with the screw.


3. Connecting wires as directed.


4. Align the lamp with the lamp holder, and tighten the lamp with the screw.

