



LED Wall Mount / Pendant Lights

Project: _____ Location: _____
 Date: _____ Part #: _____
 Notes: _____



Performance & Features

LED Source

- 3 CCT Selectable: 3000/4000/5000K
- CRI >80
- L70 lifespan of 50,000 hours
- Non-Dimmable
- 120V input voltage

Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze and white finish available
- Wet location rated
- Operates efficiently in temperatures from -40°F to 122°F
- Adjustable pendant and wall mount

Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- Backed by a 5-year limited warranty

SKU Guide

Example: AXS12-3CCT-PC-BZ


Family	Wattage	CCT	Control	Finish
AXS	12= 12W	3CCT = 3000K 4000K 5000K	PC = Photocell	BZ = Bronze WH = White

Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
AXS12-3CCT-PC-BZ	12W	1000	3000K/4000K/5000K	83	Bronze
AXS12-3CCT-PC-WH	12W	1000	3000K/4000K/5000K	83	White

Dimensions

AXS12-3CCT-PC-BZ/WH

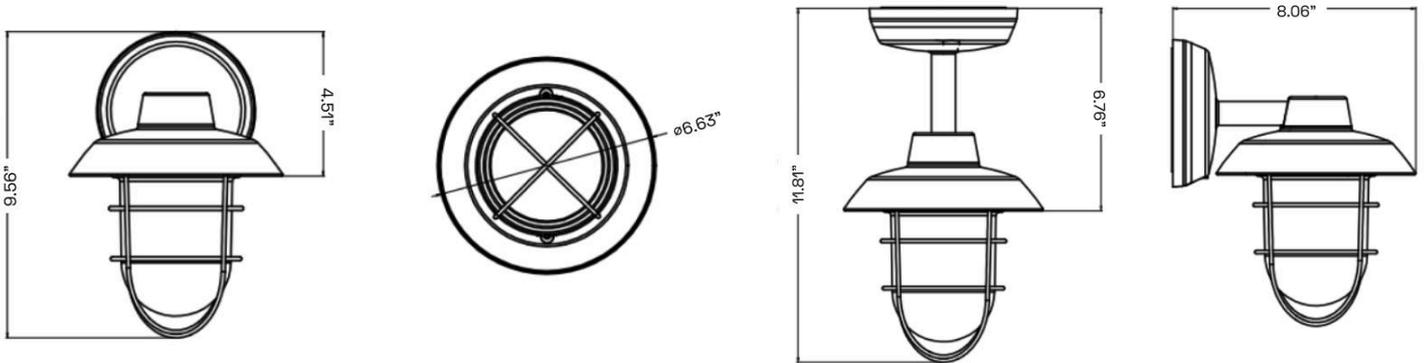


Packaging Dimensions

SKU#	Master Carton	Qty
AXS12-3CCT-PC-BZ/WH	13.90 x 13.78 x 12.4-in.	4

Photometry

AXS12-3CCT-PC-BZ/WH

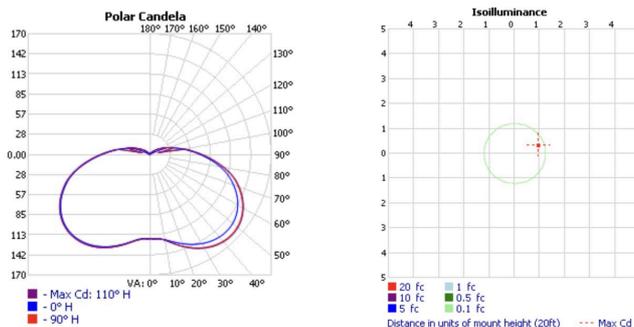

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	115.1	12.2%	12.2%
0-40	211.9	22.5%	22.5%
0-60	470.4	49.9%	49.9%
60-90	352.9	37.5%	37.5%
70-100	277.9	29.5%	29.5%
90-120	106.2	11.3%	11.3%
0-90	823.3	87.4%	87.4%
90-180	118.8	12.6%	12.6%
0-180	942.2	100%	100%