



LED Twin Head Security Lights

Project: _____ Location: _____
 Date: _____ Part #: _____
 Notes: _____



Performance & Features

LED Source

- 4000K CCT
- CRI >70
- L70 lifespan of 50,000 hours
- Non-dimmable
- 120V input voltage
- Motion Sensor and Dusk to Dawn

Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze and white finishes available
- Wet Location Rated
- Adjustable heads
- Operates efficiently in temperatures from -40°F to 122°F
- Wall Mount, Flood Mount, Eave Mount

Certifications and Warranty

- UL Listed
- FCC Complaint
- Backed by a 5-year limited warranty

SKU Guide

Example: FSXD30-MS-4K-BZ

| Family & Size | Controls | CCT | Finish |
|------------------|--------------------------------------|------------|---------------------------|
| FSXD30 FSXD60 | MS = Motion Sensor PC = Photocell | 4K = 4000K | BZ = Bronze WH = White |


Specification

| Model No. | Power (W) | Lumens (lm) | CCT (K) | LPW | Finish |
|--|-----------|-------------|---------|-----|--------------|
| Motion Sensor FSXD30-MS-4K-BZ FSXD30-MS-4K-WH | 22W | 3200 | 4000K | 145 | Bronze White |
| Photocell FSXD30-PC-4K-BZ FSXD30-PC-4K-WH | 22W | 3200 | 4000K | 145 | Bronze White |
| Motion Sensor FSXD60-MS-4K-BZ FSXD60-MS-4K-WH | 45W | 6000 | 4000K | 133 | Bronze White |

Dimensions

FSXD30-MS-4K-BZ/WH
FSXD30-PC-4K-BZ/WH

FSXD60-MS-4K-BZ/WH

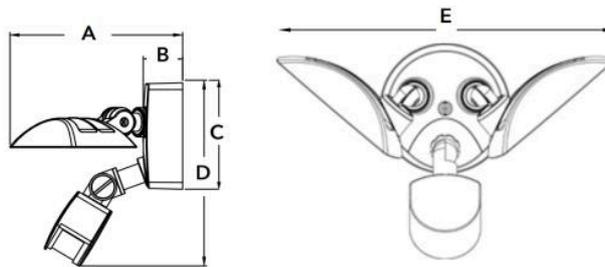



| | FSXD30 | FSXD60 |
|--------|----------------|---------------|
| A | 6.4" (163mm) | 7.4" (187 mm) |
| B | 1.7" (43 mm) | 1.7" (43 mm) |
| C | 4.9" (125 mm) | 4.9" (125 mm) |
| D | 8" (202 mm) | 8" (228 mm) |
| E | 12.7" (322 mm) | 15.3" (389mm) |
| Weight | 2.3 lbs | 2.9 lbs |

Packaging Dimensions

| SKU# | Master Carton | Qty |
|--------------------|------------------------|-----|
| FSXD30-MS-4K-BZ/WH | 19.5 x 13.6 x 10.1-in. | 4 |
| FSXD30-PC-4K-BZ/WH | 19.5 x 13.6 x 10.1-in. | 4 |
| FSXD60-MS-4K-BZ/WH | 21.1 x 15.0 x 11.0-in. | 4 |

Photometry

FSXD30-MS-4K-BZ/WH

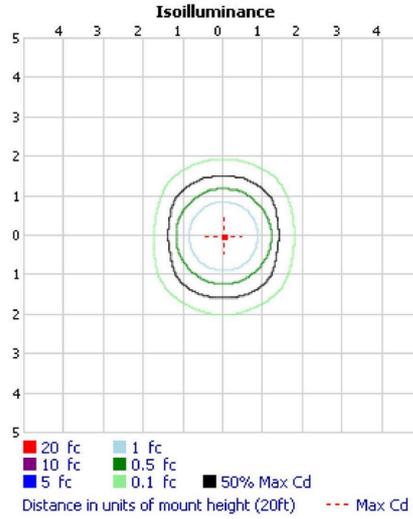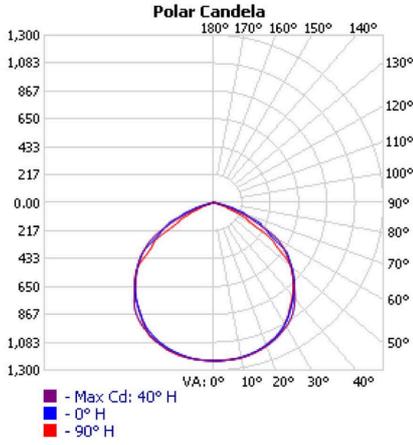

Zonal Lumen Summary

| Zone | Lumens | % Lamp | % Luminaire |
|--------|---------|--------|-------------|
| 0-30 | 982.9 | 30.1% | 30.1% |
| 0-40 | 1,624.7 | 49.7% | 49.7% |
| 0-60 | 2,865.0 | 87.6% | 87.6% |
| 60-90 | 404.3 | 12.4% | 12.4% |
| 70-100 | 90.9 | 2.8% | 2.8% |
| 90-120 | 0.1 | 0% | 0% |
| 0-90 | 3,269.3 | 100% | 100% |
| 90-180 | 0.2 | 0% | 0% |
| 0-180 | 3,269.6 | 100% | 100% |

Note: Additional Photometry available on request