

## LED Solar Workbench Shop Light

Project: \_\_\_\_\_ Location: \_\_\_\_\_  
 Date: \_\_\_\_\_ Part #: \_\_\_\_\_  
 Notes: \_\_\_\_\_



### Performance & Features

#### LED Source

- Lumileds SMD2835 with Single CCT 5000K
- CRI >70
- 20%-100% dimmable driver
- PIR Sensor with photocell tech
- An integrated USB port

#### Construction

- Highly durable die-cast aluminum, long lasting dark black finish
- Wet Location Rated
- Frosted Lens
- 8 hours charging time
- Operates efficiently in temperatures from -4°F to 104°F
- >1000 battery cycles
- 15 ft. lead wire

#### Certifications and Warranty

- UL Listed
- Backed by a 3-year limited warranty

### SKU Guide

Example: SQAD30-MS-5K-BZ


Family	Output	Controls	CCT	Finish
SQAD	30 = 24W	MS = Motion sensor	50K = 5000K	BZ = Bronze

## Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Battery Spec (Li-on)	Solar Panel
SQAD30-MS-5K-BZ	24W	2400LM	5000K	100	6.4V/6000 mAh	10W 10V 1W

Contact for custom configuration & specifications

## Dimensions

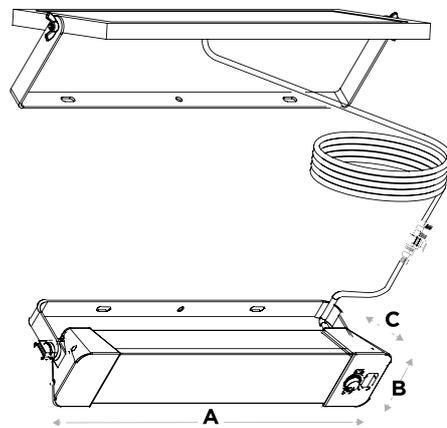

SQAD30-MS-5K-BZ	
A	16.4 in
B	3.1 in
C	4.5 in


## Modes of Operation

### 5 modes of operation:

- 4 Hr mode
- All-night mode
- Energy-Saving mode
- Motion-only mode
- Occupancy mode

### MODES OF OPERATION

(Operate at maximum of 25ft from the fixture)

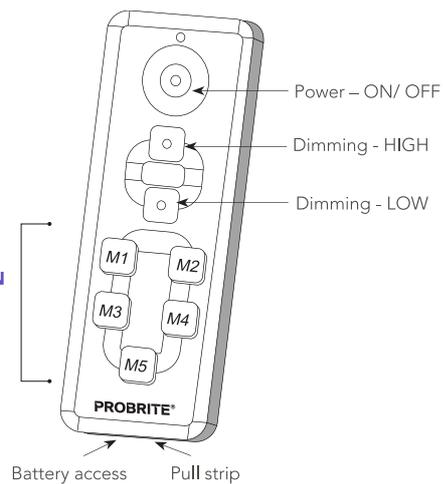

## Packaging Dimensions

SKU#	Master Carton	Qty
SQAD30-MS-5K-BZ	18.7 in X 9.9 in X 19.9 in	4