



## LED Wall Packs

Project: \_\_\_\_\_ Location: \_\_\_\_\_  
 Date: \_\_\_\_\_ Part #: \_\_\_\_\_  
 Notes: \_\_\_\_\_



### Performance & Features

#### LED Source

- 4000K CCT
- CRI >70
- L70 lifespan of 50,000 hours
- 0-10V Dimming
- 120V-277V input voltage

#### Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze and white finish available
- Wet location rated
- Wide angle optics
- Operates efficiently in temperatures from -40°F to 122°F
- Wall Mount

#### Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- Backed by a 5-year limited warranty

### SKU Guide

Example: PRWX28-H-4K-BZ


Family	Wattage	Control	CCT	Finish
PRWX	28 = 28W 50 = 50W 80 = 80W	PC = Photocell (50W/80W models)	4K = 4000K	BZ = Bronze WH = White

## Specification


Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
PRWX28-H-4K-BZ	28W	3500	4000K	125	Bronze
PRWX50-H-PC-4K-BZ PRWX50-H-PC-4K-WH	50W	6500	4000K	130	Bronze White
PRWX80-H-PC-4K-BZ	80W	10,000	4000K	125	Bronze

## Dimensions


**PRWX28-H-4K-BZ**

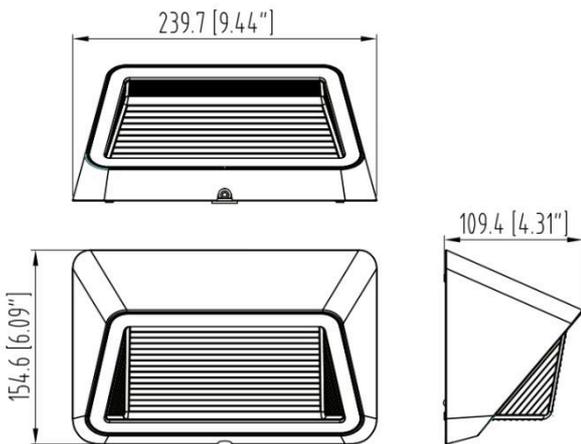

**PRWX50-H-PC-4K-BZ/WH**

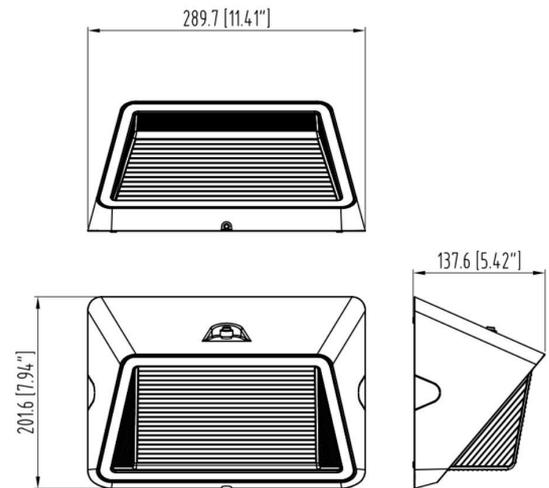

**PRWX80-H-PC-4K-BZ**


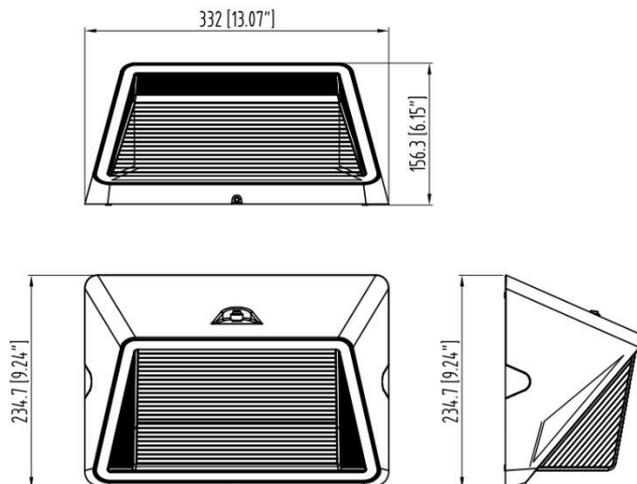


## Packaging Dimensions

SKU#	Master Carton	Qty
PRWX28-H-4K-BZ	16.4 x 12.7 x 11.3-in.	4
PRWX50-H-PC-4K-BZ/WH	22.8 x 13.3 x 10.2-in.	3
PRWX80-H-PC-4K-BZ	16.4 x 15.0 x 11.5-in.	2

## Photometry

### PRWX50-H-PC-4K-BZ/WH

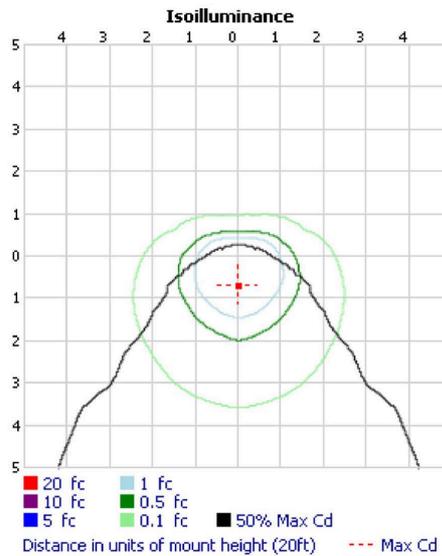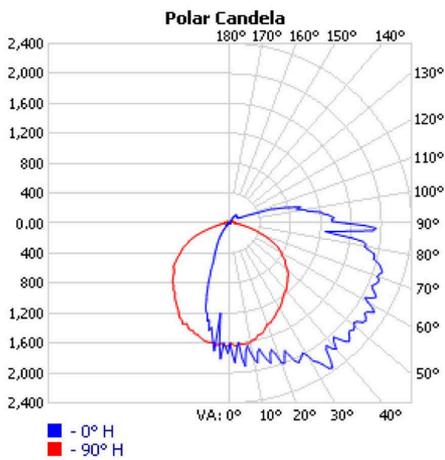

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,208.7	18.9%
0-40	1,946.0	30.5%
0-60	3,564.0	55.8%
60-90	2,009.1	31.5%
70-100	1,600.9	25.1%
90-120	685.6	10.7%
0-90	5,573.1	87.3%
90-180	813.1	12.7%
0-180	6,386.2	100%

Note: Additional Photometry available on request