



## LED Flood Lights

Project: \_\_\_\_\_ Location: \_\_\_\_\_  
 Date: \_\_\_\_\_ Part #: \_\_\_\_\_  
 Notes: \_\_\_\_\_



### Performance & Features

#### LED Source

- 4000K CCT
- CRI >70
- L70 lifespan of 50,000 hours
- 0-10V Dimming
- 120V-277V input voltage

#### Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze finish available
- Wet location rated
- Operates efficiently in temperatures from -40°F to 122°F
- Knuckle Mount

#### Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- Backed by a 5-year limited warranty

### SKU Guide

Example: PWRFX45-PC-4K-BZ


Family	Wattage	Control	CCT	Finish
PWRFX	45 = 45W 70 = 70W 110 = 110W	PC = Photocell	4K = 4000K	BZ = Bronze

## Specification


Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
PWRFX45-PC-4K-BZ	45W	6000	4000K	133	Bronze
PWRFX70-PC-4K-BZ	70W	9500	4000K	135	Bronze
PWRFX110-PC-4K-BZ	110W	14,000	4000K	127	Bronze

## Dimensions


**PWRFX45-PC-4K-BZ**

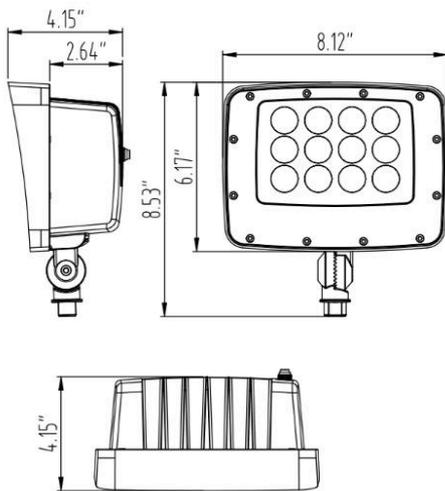

**PWRFX70-PC-4K-BZ**

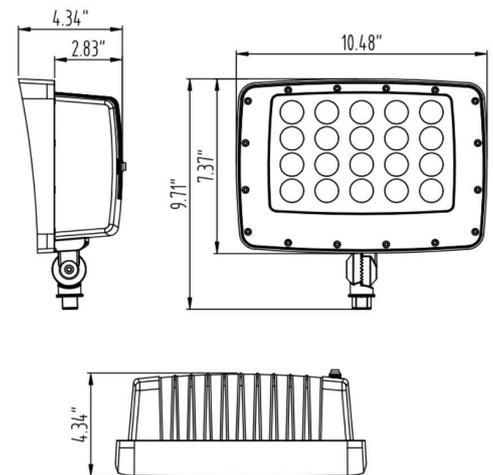

**PWRFX110-PC-4K-BZ**

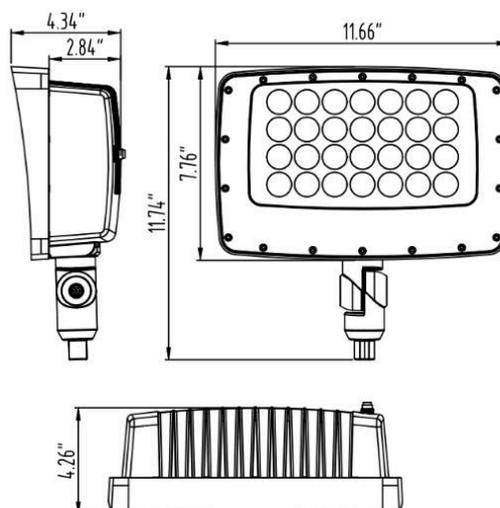


## Packaging Dimensions

SKU#	Master Carton	Qty
PWRFX45-PC-4K-BZ	20.87 x 12.09 x 9.84-in.	4
PWRFX70-PC-4K-BZ	12.91 x 12.52 x 11.02-in.	2
PWRFX110-PC-4K-BZ	14.02 x 12.52 x 12.02-in.	2

## Photometry

PWRFX45-PC-4K-BZ

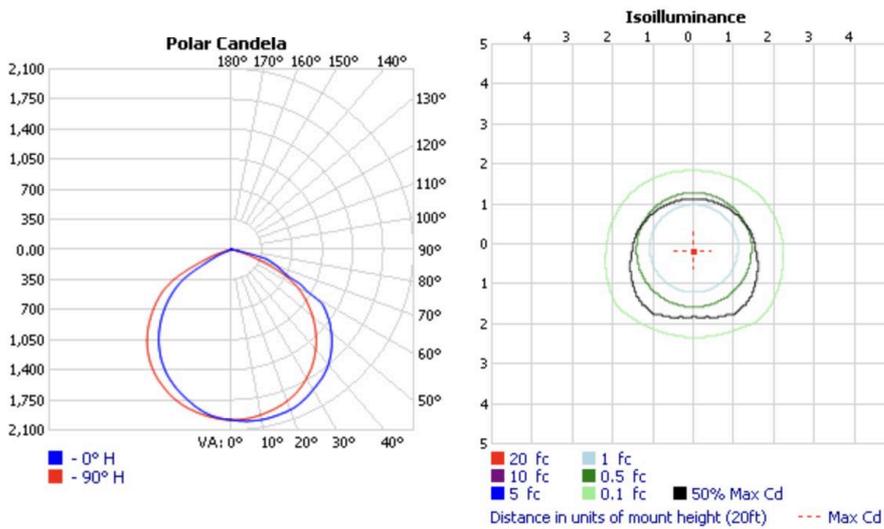

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,562.3	29.3%	29.3%
0-40	2,582.7	48.5%	48.5%
0-60	4,592.6	86.3%	86.3%
60-90	731.5	13.7%	13.7%
70-100	165.3	3.1%	3.1%
90-120	0.1	0%	0%
0-90	5,324.1	100%	100%
90-180	0.5	0%	0%
0-180	5,324.6	100%	100%

Note: Additional Photometry available on request