



## LED Flood Lights

Project: \_\_\_\_\_ Location: \_\_\_\_\_  
 Date: \_\_\_\_\_ Part #: \_\_\_\_\_  
 Notes: \_\_\_\_\_



### Performance & Features

#### LED Source

- 4000K CCT
- CRI >80
- L70 lifespan of 50,000 hours
- 0-10V Dimming
- 120V-277V input voltage

#### Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze finish available
- Wet location rated
- Operates efficiently in temperatures from -40°F to 122°F
- Knuckle Mount

#### Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- Backed by a 5-year limited warranty

### SKU Guide

Example: PWRF20-4K-BZ


Family	Wattage	Control	CCT	Finish
PWRF	20 = 20W 50 = 50W	PC= Photocell (50W model)	4K = 4000K	BZ = Bronze

## Specification


Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
PWRF20-4K-BZ	20W	2000	4000K	100	Bronze
PWRF50-PC-4K-BZ	50W	5000	4000K	100	Bronze

## Dimensions

PWRF20-4K-BZ

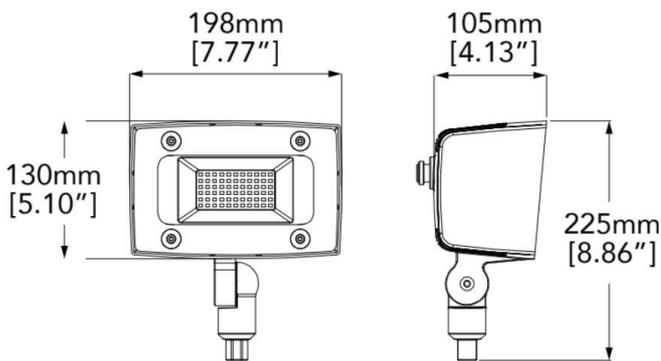

PWRF50-PC-4K-BZ


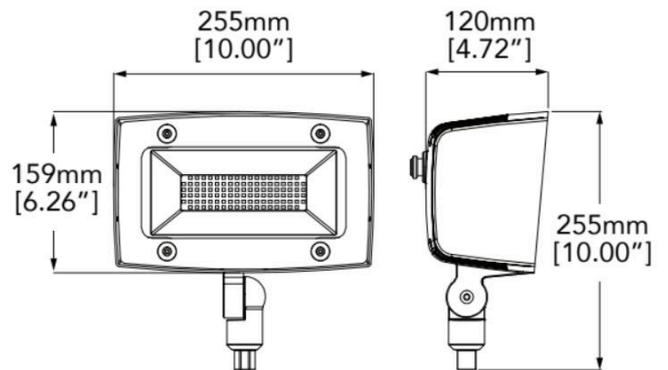


## Packaging Dimensions

SKU#	Master Carton	Qty
PWRF20-4K-BZ	15.00 x 19.25 x 10.91-in.	4
PWRF50-PC-4K-BZ	15.00 x 21.22 x 13.11-in.	4

Photometry

PWRF20-4K-BZ

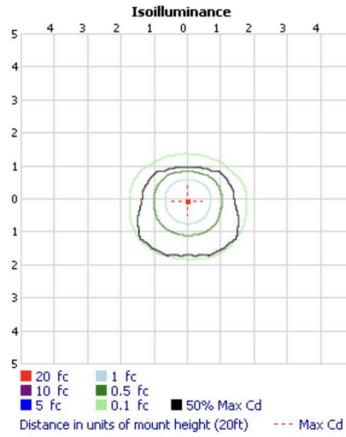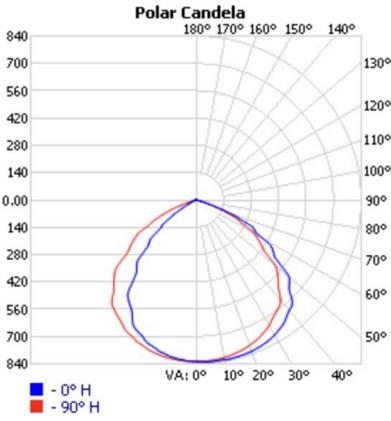

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	663.9	31%	31%
0-40	1,103.1	51.5%	51.5%
0-60	1,904.7	88.9%	88.9%
60-90	237.7	11.1%	11.1%
70-100	42.6	2%	2%
90-120	0.0	0%	0%
0-90	2,142.4	100%	100%
90-180	0.2	0%	0%
0-180	2,142.6	100%	100%

Note: Additional Photometry available on request