


## PowerWall X Mini LED Wall Pack

Project: \_\_\_\_\_ Location: \_\_\_\_\_  
 Date: \_\_\_\_\_ Part #: \_\_\_\_\_  
 Notes: \_\_\_\_\_



### Performance & Features

#### LED Source

- Single 4000K CCT
- CRI >70
- L70 lifespan of 50,000 hours
- Non Dimming
- 120-277V input voltage
- Integrated photocell

#### Construction

- Highly durable die-cast aluminum housing
- Long-lasting bronze finish available
- Wet location rated
- Operates efficiently in temperatures from -40°F to 122°F
- Wall Mount

#### Certifications and Warranty

- UL Listed
- Backed by a 5-year limited warranty

### SKU Guide

Example: PRWX15-V-PC-4K-BZ


Family	Wattage	Controls	CCT	Finish
PRWX	15 = 15W 30 = 30W	PC = Photocell	4K = 4000K	BZ = Bronze

## Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
PRWX15-V-PC-4K-BZ	15W	1500	4000K	100	Bronze
PRWX30-V-PC-4K-BZ	30W	3000	4000K	100	Bronze

## Dimensions

PRWX15-V-PC-4K-BZ  
PRWX30-V-PC-4K-BZ

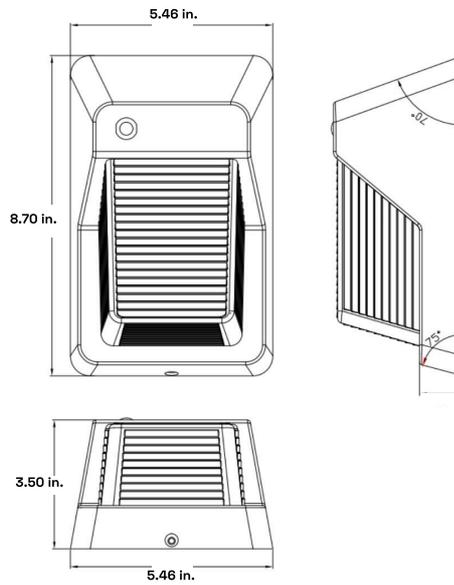


## Packaging Dimensions

SKU#	Master Carton	Qty
PRWX15-V-PC-4K-BZ	16.37 x 9.76 x 6.10-in.	4
PRWX30-V-PC-4K-BZ	20.39 x 12.08 x 7.63-in.	4

## Photometry

PRWX15-V-PC-4K-BZ

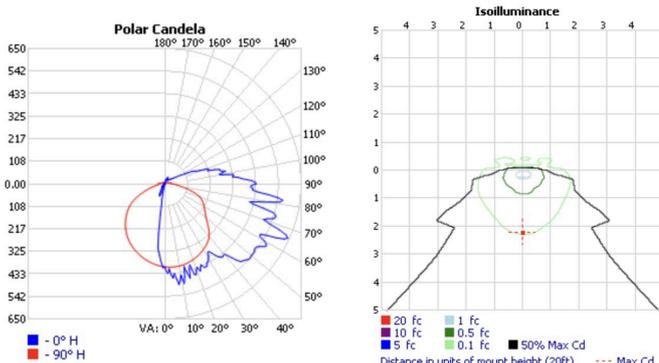

### Zonal Lumens Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	239.8	14.9%	14.9%
0-40	390.1	24.3%	24.3%
0-60	770.8	48%	48%
60-90	552.8	34.4%	34.4%
70-100	466.9	29.1%	29.1%
90-120	240.7	15%	15%
0-90	1,323.6	82.5%	82.5%
90-180	281.0	17.5%	17.5%
0-180	1,604.6	100%	100%