



LED Area Light

Project: _____ Location: _____
 Date: _____ Part #: _____
 Notes: _____



Performance & Features

LED Source

- Lumileds SMD2835 LEDs with single CCT (4000K/5000K)
- CRI >80
- L70 lifespan of 100,000 hours
- 0-10V dimmable driver
- 120-277V input
- Built-in 6kV surge protection
- <5% flicker

Construction

- Highly durable die-cast aluminum housing
- Long-lasting dark bronze finish available
- Wet Location Rated
- 45° beam angle
- Distribution Type 3
- Operates efficiently in temperatures from -40°F to 122°F

Certifications and Warranty

- UL Listed
- DLC 5.1 Premium
- Backed by a 5-year limited warranty

SKU Guide

Example: ARLL-200W-50K-DV2-PC-T3-BZ

Family	Wattage	CCT	Driver & Voltage		Controls	Distribution	Finish
ARLL	150W 200W 300W	40K = 4000K 50K = 5000K	D = 0-10V Dimming	V2 = 120-277V	PC = Photocell	T3 = Type 3	BZ = Bronze

Specification

Model No.	Power (W)	Lumens (lm)	CCT (K)	LPW	Finish
150W - Single CCT & Single Wattage ARLM-150W-[40K/50K]-DV2-PC-T3-BZ	150W	22,000	4000K 5000K	150	Bronze
200W - Single CCT & Single Wattage ARLL-200W-[40K/50K]-DV2-PC-T3-BZ	200W	28,000	4000K 5000K	140	Bronze
300W - Single CCT & Single Wattage ARLL-300W-50K-DV2-PC-T3-BZ	300W	43,500	5000K	145	Bronze

Contact for custom configuration & specifications

Accessories



Slip Fitter Mount
ARL-AM



Direct Arm Mount
ARL-DM



Universal Mount
ARL-ADM




Yoke Mount
ARL-YM




U-Bracket
ARL-FM-S
ARL-FM-L

Dimensions

ARLM-150W-xxK-DV2-PC-T3-BZ
ARLL-200W-50K-DV2-PC-T3-BZ

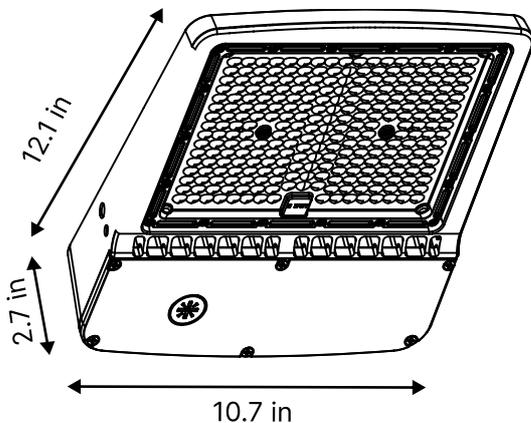

ARLL-300W-50K-DV2-PC-T3-BZ


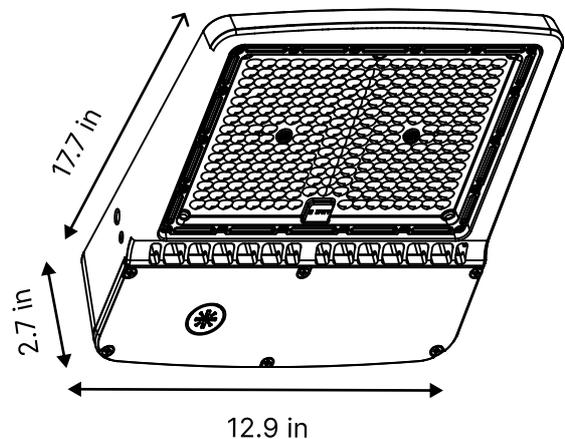


Packaging Dimensions

SKU#	Master Carton	Qty
ARLL-150W-xxK-DV2-PC-T3-BZ	20.28×6.10×15.6 in	1
ARLL-200W-50K-DV2-PC-T3-BZ	21.14×5.61×13.14 in	1
ARLL-300W-50K-DV2-PC-T3-BZ	25.9×5.61×15.9 in	1

Photometry

ARLL-200W-50K-DV2-PC-T3-BZ

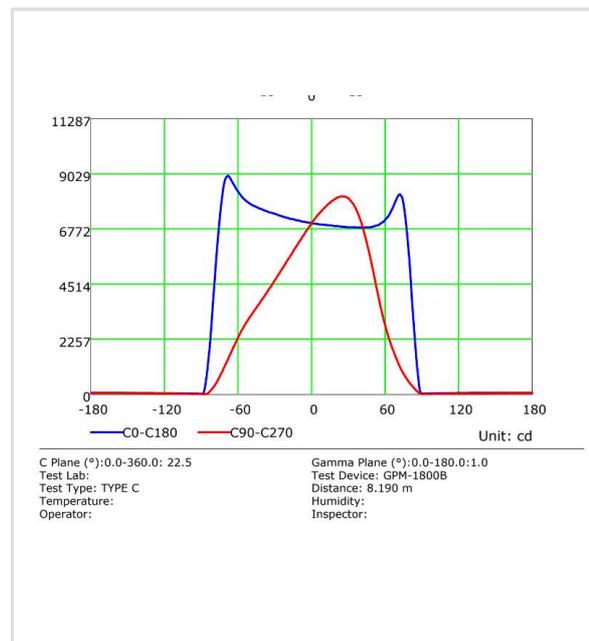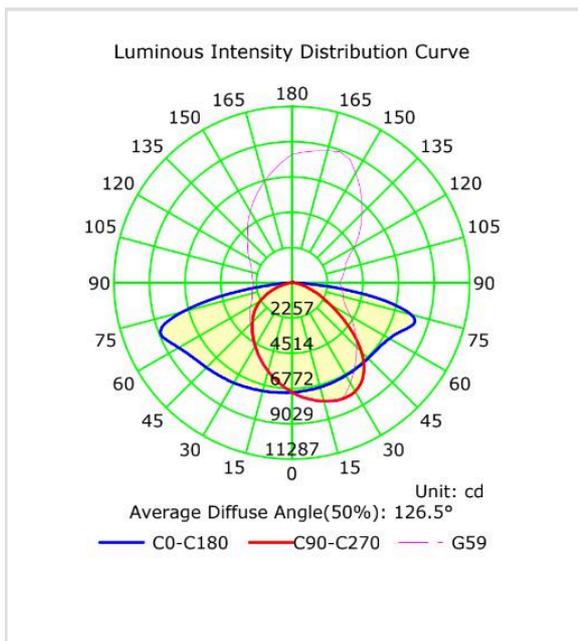

Note: Additional Photometry available on request