


LED Center Basket Troffers

5 CCT and 5 Wattage Selectable

Project: _____ Location: _____
 Date: _____ Part #: _____
 Notes: _____



Performance & Features

LED Source

- Lumileds SMD2835 LEDs with 5-CCT White Color Selectable (3000K/3500K/4000K/5000K/6500K)
- CRI >80
- L70 lifespan of 100,000 hours
- 0-10V dimmable driver
- 120-277V input
- Flicker-free performance

Construction

- Highly durable die-cast aluminum housing
- Long-lasting white finish available
- Damp Location Rated
- 120° beam angle
- Frosted lens
- Operates efficiently in temperatures from -40°F to 140°F

Certifications and Warranty

- UL Listed
- ETL Listed
- FCC Complaint
- Backed by a 5-year limited warranty

SKU Guide

Example: TR02-20T40-5CCT-DV2-WH

| Family & Size | Wattage | CCT | Driver & Voltage | Finish | Options |
|--------------------------|--|--|------------------------------------|------------|---------------------|
| TR02 = 2x2 TR04 = 2x4 | 20T40W = 20/25/30/35/40W 20T50W = 20/25/30/40/50W | 5CCT = 3000K 3500K 4000K 5000K 6500K | D = 0-10V Dimming V2 = 120-277V | WH = White | EM = Battery Backup |

Specification

| Model No. | Power (W) | Lumens (lm) | CCT (K) | LPW | Finish |
|--------------------------------------|-----------------|------------------------------|---|-----|--------|
| 2x2 TRO2-20T40-5CCT-DV2-WH | 20/25/30/35/40W | 2500/3125/3750 /4375/5000 | 5CCT 3000K/3500K/4000K /5000K/6500K | 125 | White |
| 2x4 TRO4-20T50-5CCT-DV2-WH | 20/25/30/40/50W | 2500/3125/3750 /5000/6200 | 5CCT 3000K/3500K/4000K /5000K/6500K | 125 | White |

Contact for custom configuration & specifications

Accessories




**Microwave
Motion Sensor**
TRO-MS




EM Battery Backup

Dimensions

TRO2-20T40-5CCT-DV2-WH

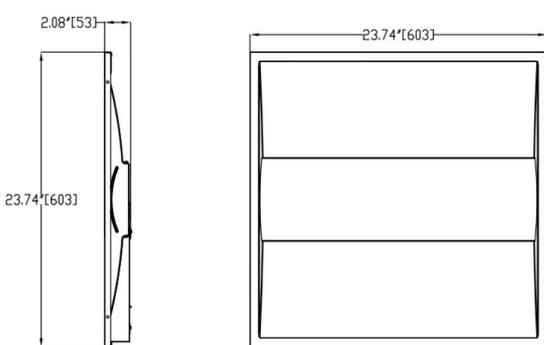

TRO4-30T50-5CCT-DV2-WH


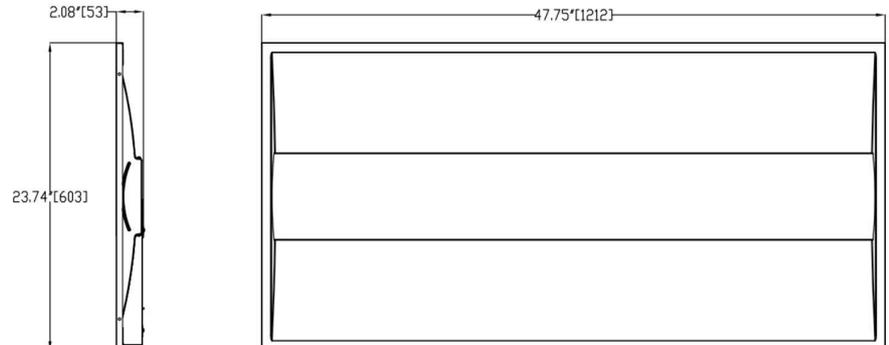


Packaging Dimensions

| SKU# | Master Carton | Qty |
|------------------------|-----------------|-----|
| TRO2-20T40-5CCT-DV2-WH | 25.5x25.7x5.5in | 2 |
| TRO4-30T50-5CCT-DV2-WH | 49.4x24.0x4.8in | 2 |

Photometry



TRO2-20T40-5CCT-DV2-WH

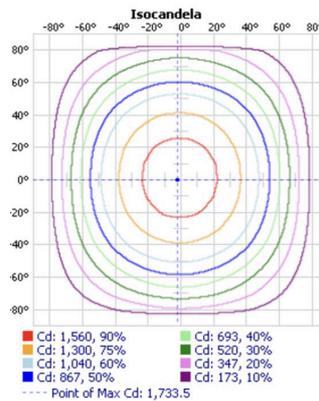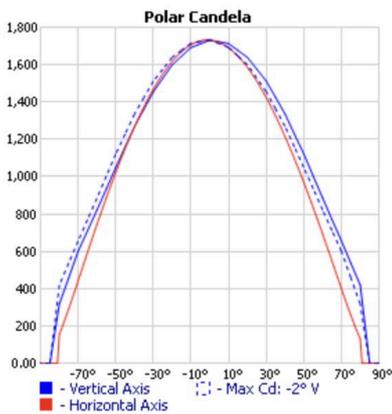

Zonal Lumens Summary

| Zone | Lumens | % Lamp | % Luminaire |
|--------|---------|--------|-------------|
| 0-30 | 1,341.1 | 26.6% | 26.6% |
| 0-40 | 2,198.2 | 43.6% | 43.6% |
| 0-60 | 3,906.0 | 77.4% | 77.4% |
| 60-90 | 1,139.0 | 22.6% | 22.6% |
| 70-100 | 495.4 | 9.8% | 9.8% |
| 90-120 | 0.000 | 0% | 0% |
| 0-90 | 5,045.1 | 100% | 100% |
| 90-180 | 0.000 | 0% | 0% |
| 0-180 | 5,045.1 | 100% | 100% |

TRO4-30T50-5CCT-DV2-WH

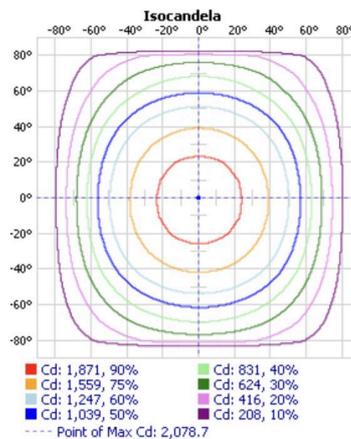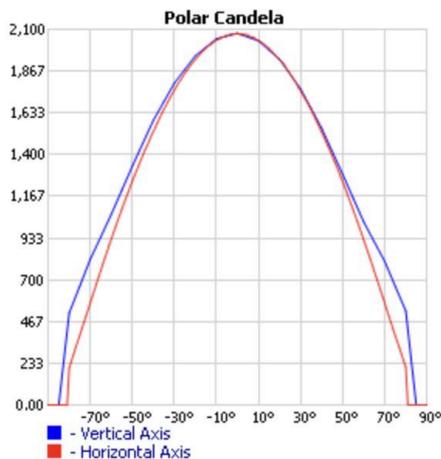

Zonal Lumens Summary

| Zone | Lumens | % Lamp | % Luminaire |
|--------|---------|--------|-------------|
| 0-30 | 1,614.1 | 25.6% | 25.6% |
| 0-40 | 2,654.6 | 42.1% | 42.1% |
| 0-60 | 4,761.9 | 75.5% | 75.5% |
| 60-90 | 1,544.8 | 24.5% | 24.5% |
| 70-100 | 717.4 | 11.4% | 11.4% |
| 90-120 | 0.000 | 0% | 0% |
| 0-90 | 6,306.7 | 100% | 100% |
| 90-180 | 0.000 | 0% | 0% |
| 0-180 | 6,306.7 | 100% | 100% |

Note: Additional Photometry available on request