

RLK16-833D8-A

4K 3X Optical Zoom Smart PoE Security Camera System with 4TB HDD & 16CH NVR for 24/7 Recording

- 4K UHD & 3X Optical Zoom
- Color Night Vision
- 4TB HDD 16-Channel NVR



Specifications

| Hardware | |
|---------------------------------|---------------------------|
| Hardware | N6MB01 |
| Video/Audio Input | |
| Video Input | |
| Audio Input | Cameras with built-in mic |
| Video/Audio Output | |
| Video Output | VGA, HDMI |
| HDMI Output Resolution | |
| VGA Output Resolution | |
| Audio Output | 1-channel, RCA |
| Decoding | |
| Video Format | H.265, H.264 |
| Live View / Playback Resolution | |

| | |
|---------------------------|---|
| Synchronous Playback | Up to 4 channels |
| Storage | |
| Internal HDD | |
| External HDD | |
| Capacity | |
| External Interface | |
| USB Interface | 2 x USB 2.0 |
| Network Interface | |
| PoE | |
| Max. Power Per Port | 25W |
| Supported Standard | IEEE 802.3 af/at |
| Network | |
| Network Protocols | |
| Browsers Supported | |
| OS Supported | PC: Windows, Mac OS; Smartphone: iOS, Android |
| Max. User Access | 20 users (1 admin account & 19 user accounts); supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams) |
| General | |
| Power Supply | DC 52V/2.88A |
| Power Consumption | <10W (without HDD&PoE) |
| Working Environment | Temperature: -10°C~+55°C (14°F~131°F); humidity: 10%~90% |
| Dimensions | 330 x 45 x 285mm |
| Weight | 2.4kg |
| Warranty | |
| Limited Warranty | |

Gallery & Specs



1. Mount
2. Metal Aluminum Case
3. Spotlight
4. IR LEDs
5. High Definition Lens
6. Daylight Sensor
7. Built-in Mic
8. Speaker




Manual rotation only.



1. Power
2. Reset Button
3. Network



1. USB Port
2. Power LED/HDD LED
3. Control Panel

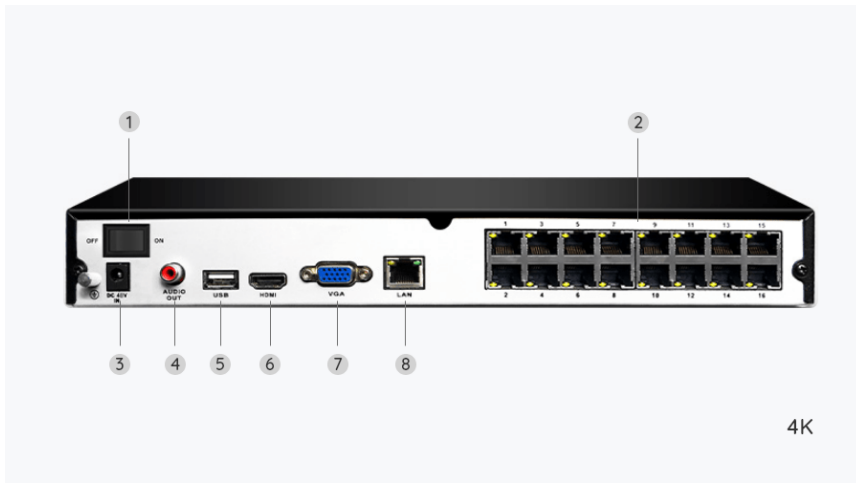

1. On/Off Switch
2. RJ45
3. Power Input
4. Audio Out
5. USB Port
6. HDMI Port
7. VGA Port
8. Network

www.reolink.com