

RLK8-CX410B4

Smart 2K 8-Channel PoE Security Camera System with ColorX Night Vision, Smart Detection, Secure Local storage with Pre-Installed 2TB HDD, 24/7 Continuous Recording, Two-Way Audio, Easy Plug & Play.

- True Color Night Vision in the Dimmest Light
- F1.0 Super Aperture
- Person/Vehicle/Animal Detection
- 8CH NVR with 2TB HDD



Specifications

Hardware	
Hardware	N7MB01
Video/Audio Input	
IP Video Input	PoE IP camera x 8
Audio Input	Cameras with built-in mic
Video/Audio Output	
HDMI Output Resolution	3840x2160, 1920x1080, 1280x1024, 1280x720, 1024x768
VGA Output Resolution	1920x1080, 1280x1024, 1280x720, 1024x768
Audio Output	1-channel, RCA
Decoding	


Video Format	H.264, H.265
Live View/Playback Resolution	7680×2160, 4608×1728, 4512×2512, 4096×3072, 3840×2160, 2560×2560, 2560×1920, 2560×1440, 2048×1536, 2304×1296, 1080p, 720p
Synchronous Playback	Up to 4 channels
HDD	
SATA	1 x SATA interface (1 x 2TB HDD included)
External HDD	1 eSATA interface for HDD
Capacity	Up to 16TB (max. 6TB capacity for each HDD)
External Interface	
USB Interface	2 x USB 2.0
Network Interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface for LAN/WAN 8, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera
PoE	
Max. Power Per Port	25W
Supported Standard	IEEE 802.3af/at
Network	
Network Protocols	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
Browsers Supported	Edge, Firefox, Chrome, Safari
OS Supported	PC: Windows, Mac OS; smartphone: iOS, Android
Max. User Access	20 users (1 admin account & 19 user accounts); up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
General	
Power Supply	DC 48V~53V

Power Consumption	<10W (without HDD&PoE)
Working Environment	Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90%
Dimensions	260 x 41 x 230mm
Weight	1.4kg
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .

Gallery & Specs



- 1. USB Port
- 2. Power LED & HDD LED
- 3. Control Panel

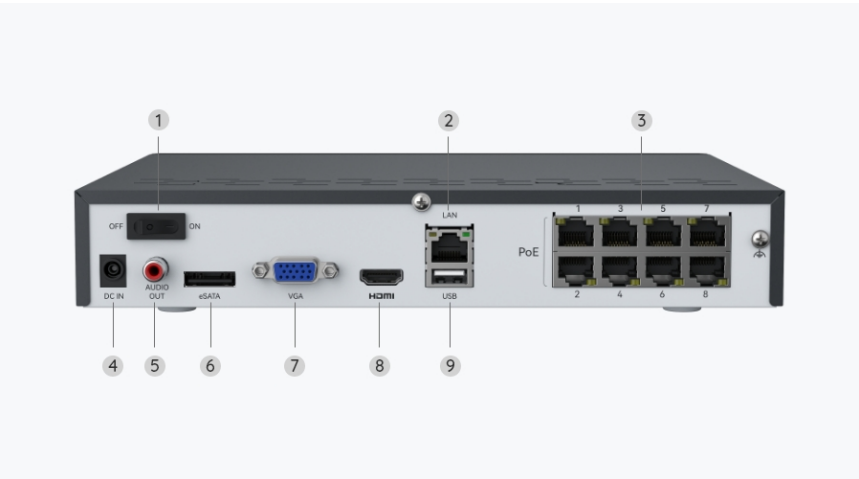


- 1. On/Off Switch
- 2. Network
- 3. RJ45
- 4. Power Input
- 5. Audio Out
- 6. eSATA
- 7. VGA Port
- 8. HDMI Port
- 9. USB Port



1. Bracket
2. Speakers
3. Aluminum Housing
4. Lens
5. Spotlight



1. microSD Card Slot

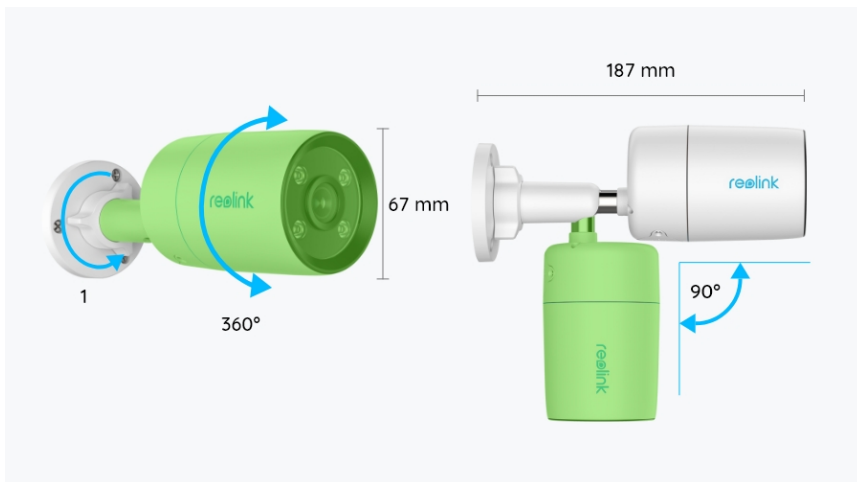

1. Turn the adjustment knob (counter-clockwise) to loosen the bracket and adjust the camera in any direction.
2. Turn the adjustment knob back after adjustment to fix the camera.



1. Power
2. Reset Button
3. Network