

PRODUCT ID: 27809  
Outdoor Blank-out LED Backlit Sign

MODEL  
PHX1418G-121/120-277VAC



DIMENSIONS  
14" H x 18" W x 2.25" D (est. 7.702 lbs)

CLASS  
Class: PHX Series  
Control Method: Switch (not included) or external relay.

CONSTRUCTION  
Back Construction: 0.050" Lift-n-Shift Back  
Cabinet: 1-piece, corrosion resistant, extruded all-weather frame, 2.25" deep.  
Face Material: 1/8" thick, dark grey diffused acrylic  
Faces: Single Faced Sign  
Finish: Duranodic Bronze  
Graphic: Printed graphic applied to surface  
Mounting Channel: None

ELECTRICAL  
Flashing: Not Included  
Input Voltage: 120-277 VAC  
UL/cUL Listed: Listed for wet locations


MESSAGE  
Color: Black opaque  
Font: Swiss 721 Bold BT  
Illumination: Backlit with high intensity LEDs. Message blanks out when off  
Sign Messages: See message table below

| MESSAGE  | LED/COLOR            | HEIGHT | AMPS        |
|----------|----------------------|--------|-------------|
| ATM LANE | Green Wide Angle LED | 3.5"   | 0.368-0.159 |

NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

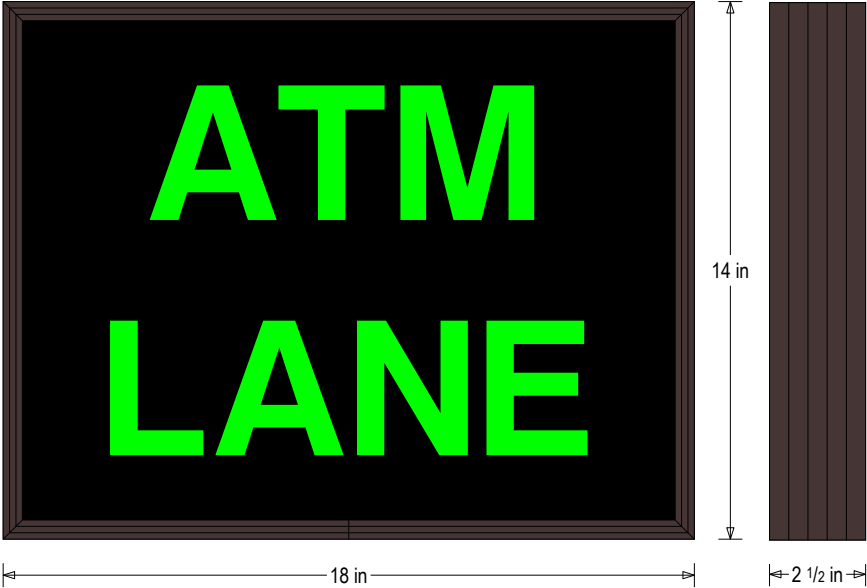

Frame Detail

