

PRODUCT ID: 39606
Outdoor Blank-out LED Backlit Sign

MODEL
PHX1434RR-K166/120-277VAC



DIMENSIONS
14" H x 34" W x 2.25" D (est. 11.495 lbs)

CLASS
Class: PHX Series
Control Method: Switch (not included) or external relay.

CONSTRUCTION
Back Construction: 0.050" Lift-n-Shift Back
Cabinet: 1-piece, corrosion resistant, extruded all-weather frame, 2.25" deep.
Face Material: 1/8" thick, dark grey diffused acrylic
Faces: Single Faced Sign
Finish: Duranodic Bronze
Graphic: Printed graphic applied to surface
Mounting Channel: None

ELECTRICAL
Flashing: Not Included
Input Voltage: 120-277 VAC
UL/cUL Listed: Listed for wet locations

MESSAGE
Color: Black opaque
Font: Swiss 721 Bold BT
Illumination: Backlit with high intensity LEDs. Message blanks out when off
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
STILL GRADING	Red Wide Angle LED	3.0"	0.231-0.100
REJECT CONTACT OPERATOR	Red Wide Angle LED	1.625"	0.231-0.100


NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.



Sample Display Options

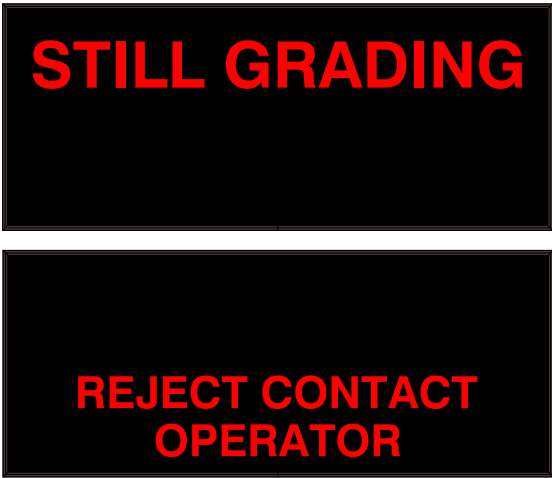

Frame Detail

