

**PRODUCT ID: 54055**  
**LED Traffic Controller**

**MODEL**  
TCILV-RG-B502/120-277VAC



**DIMENSIONS**  
14" H x 7" W x 6" D (est. 99999.999 lbs)

**CLASS**  
Class: TCIL Series

**CLASS**  
Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
Cabinet: Injection molded impact resistant polycarbonate housing and hood  
Faces: Single Faced Sign  
Finish: Duranodic Bronze  
Lens: Left or Top: Red Impact resistant tinted Lexan®  
Lens: Right or Bottom: Green Impact resistant tinted Lexan®

**ELECTRICAL**  
Flashing: Not Included  
Input Voltage: 120-277 VAC  
UL/cUL Listed: Listed for wet locations



**MESSAGE**  
Illumination: Super bright direct-view LEDs on replaceable circuit board.  
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Pedestrian Symbol (Red)	Red Wide Angle LED	4.25"	0.033-0.014
Pedestrian Symbol (Green)	Green Wide Angle LED	4.25"	0.054-0.024

NOTE: Above messages are independently controlled.

**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

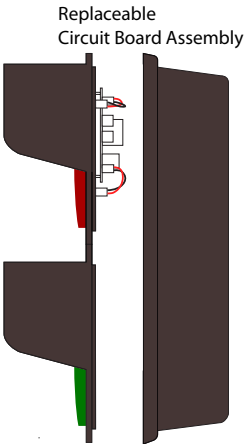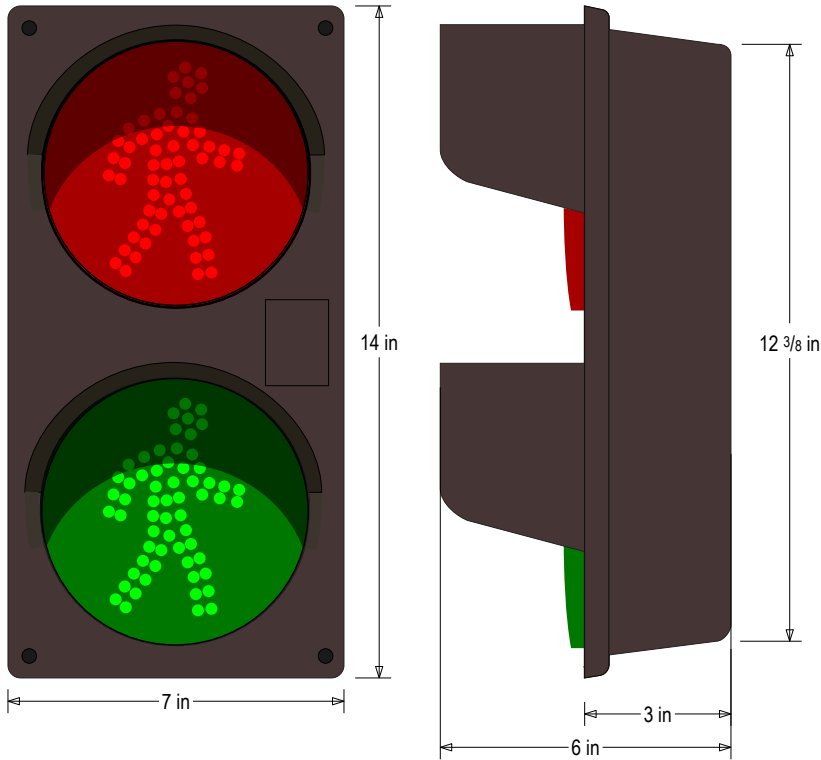

**Sample Display Options**

