

PRODUCT ID: 54439

Outdoor LED Backlit Sign

MODEL

PHXF1016DW-193RR/120-277VAC



DIMENSIONS

10" H x 16" W x 5.5" D (est. 17.183 lbs)

CLASS

CLASS: PHXF Series

Control Method: Switch (not included) or external relay.

CONSTRUCTION

Back Construction: 0.050" Lift-n-Shift Back

Cabinet: Corrosion resistant, extruded aluminum frame. 5.5" deep, mitered construction.

Face Material: 1/8" thick, impact modified acrylic (0000)

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Mounting Channel: None

ELECTRICAL

Flashing: Not Included

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Red translucent

Font: Swiss 721 Bold BT

Illumination: White high intensity LED backlit. Message always visible.

Sign Messages: See message table below


| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|--------------|---------------------------------------|--------|-------------|
| LASER IN USE | Red Translucent, White Wide Angle LED | 2.125" | 0.239-0.103 |
| LASER IN USE | Red Translucent, White Wide Angle LED | 2.125" | 0.239-0.103 |

NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

Side A

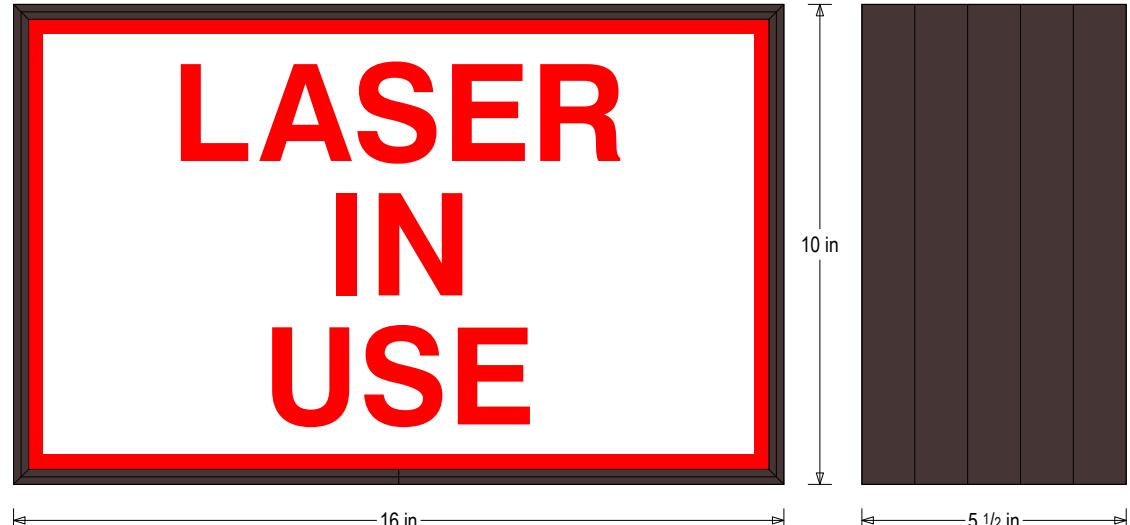

Side B



Frame Detail

