

PRODUCT ID: 64278

Space Available Sign

MODEL

S-SA2060GR-02-Q565/120-277VAC



DIMENSIONS

20" H x 60" W x 5.5" D (est. 66.783 lbs)

CLASS

Class: SA Series Smart Sign

Control Method: RedStorm Sign Control and Reporting Software Comms (by others): PC or Windows server, Ethernet and static lease required

CONSTRUCTION

Back Construction: 0.125" Aluminum sheet

Cabinet: Corrosion resistant, extruded aluminum frame with a hinged face. 5.5" deep, mitered construction. LED displays are attached using sign-in-sign construction. Moisture absorbent interior coating.

Face Material: 1/8" thick routed aluminum panel.

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Vinyl applied graphic

Number of Displays: (2)

ELECTRICAL

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: White reflective vinyl (7812)


Display Type: 718 Green 7-Seg | Red FULL Display

Font: Swiss 721 Bold BT

Sign Messages: See message table below

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

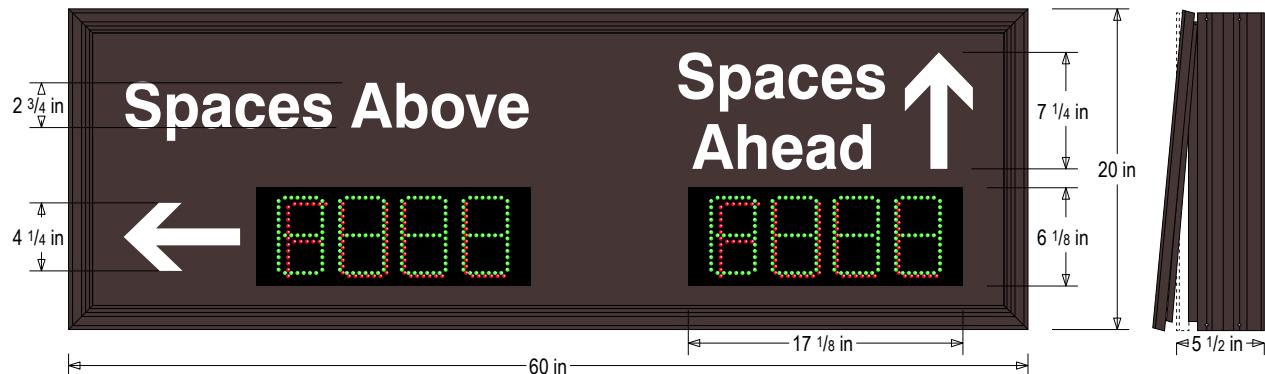

MESSAGE	LED/COLOR	HEIGHT	AMPS
4-digit Seven Segment w/ FULL	Green, Red Wide Angle LED	4.5"	0.177-0.077
4-digit Seven Segment w/ FULL	Green, Red Wide Angle LED	4.5"	0.177-0.077

NOTE: Above messages are independently controlled.

43126, Smart
Seven Segment
Display Functions

OPEN

CL5d

384

FULL

Frame Detail

