

# PRODUCT ID: 64715

## Space Available Sign

**MODEL**  
S-SA2789GRW-Q704/120-277VAC



**DIMENSIONS**  
27" H x 89" W x 5.5" D (est. 113.168 lbs)

**CLASS**  
**Class:** SA Series Smart Sign  
**Control Method:** RedStorm Sign Control and Reporting Software Comms (by others): PC or Windows server, Ethernet and static lease required

**CONSTRUCTION**  
**Back Construction:** 0.125" Aluminum sheet  
**Cabinet:** Corrosion resistant, extruded aluminum frame with a hinged face. 5.5" deep, mitered construction. LED displays are attached using sign-in-sign construction. Moisture absorbent interior coating.  
**Face Material:** 1/8" thick routed aluminum panel.  
**Faces:** Single Faced Sign  
**Finish:** Duranodic Bronze  
**Graphic:** Printed graphic applied to surface  
**Number of Displays:** (4)

**ELECTRICAL**  
**Input Voltage:** 120-277 VAC  
**UL/cUL Listed:** Listed for wet locations


**MESSAGE**  
**Color:** Refer to message table (Printed Blue TBD, Blue, Black)  
**Display Type:** ((44320) 4-Digit Seven Segment w/ FULL, (64713) 2-Digit Seven Segment)  
**Font:** Swiss 721 Bold BT  
**Sign Messages:** See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029

NOTE: Above messages are independently controlled.

# Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

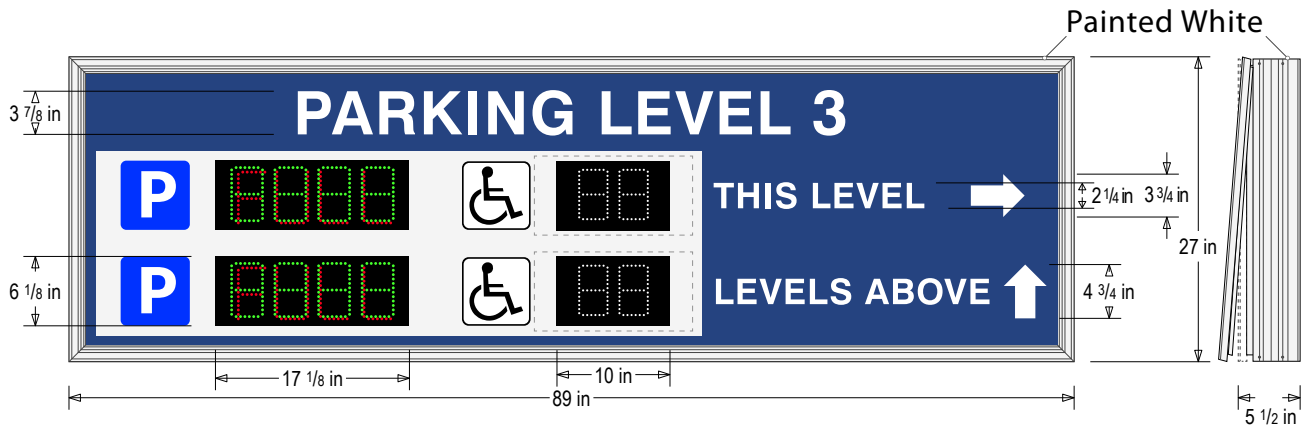


44320, Smart  
Seven Segment  
Display Functions



FULL



64713, Smart  
Seven Segment  
Display Functions



Frame Detail

