

PRODUCT ID: 64716

Space Available Sign

MODEL

S-SA4673GRW-Q704/120-277VAC

DIMENSIONS

46" H x 73" W x 5.5" D (est. 167.35 lbs)

CLASS

Class: SA Series Smart Sign

Control Method: RedStorm Sign Control and Reporting Software Comms (by others): PC or Windows server, Ethernet and static lease required

CONSTRUCTION

Back Construction: 0.125" Aluminum sheet

Cabinet: Corrosion resistant, extruded aluminum frame with a hinged face. 5.5" deep, mitered construction. LED displays are attached using sign-in-sign construction. Moisture absorbent interior coating.

Face Material: 1/8" thick routed aluminum panel.

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Printed graphic applied to surface

Number of Displays: (10)

ELECTRICAL

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: Refer to message table (Printed Blue TBD, Blue, Black)

Display Type: ((44320) 4-Digit Seven Segment w/ FULL, (64713) 2-Digit Seven Segment)


Font: Swiss 721 Bold BT

Sign Messages: See message table below



Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

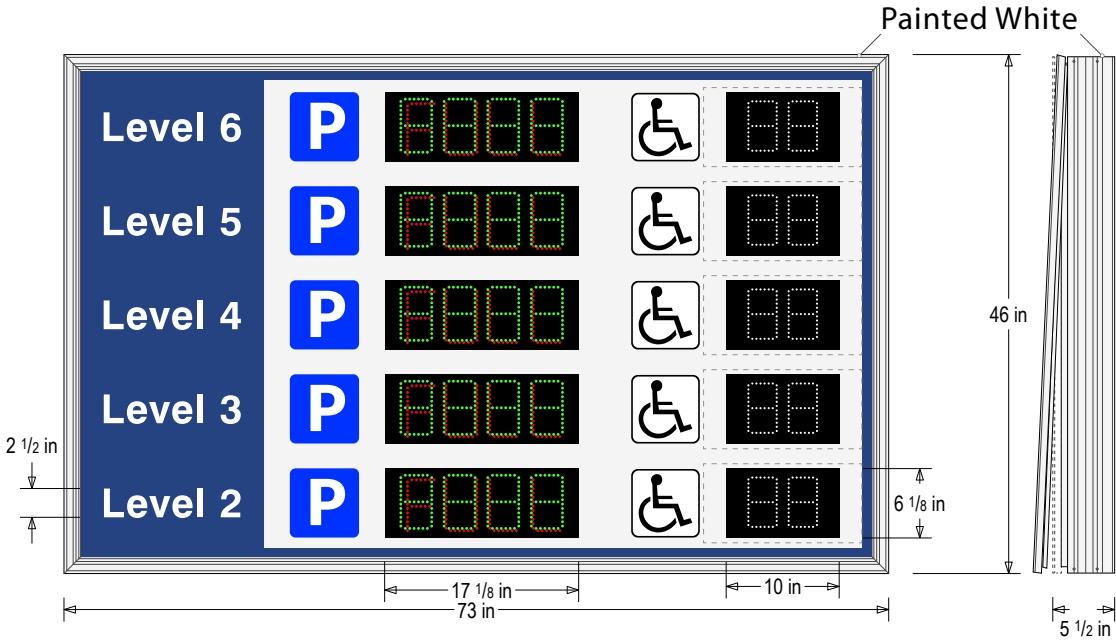

MESSAGE	LED/COLOR	HEIGHT	AMPS
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029
4-digit Seven Segment w/ FULL	Green, Red	4.5"	0.177-0.077
2-digit Seven Segment	White	4.5"	0.067-0.029

NOTE: Above messages are independently controlled.


44320, Smart
Seven Segment
Display Functions



FULL



64713, Smart
Seven Segment
Display Functions



Frame Detail

