

# PRODUCT ID: 67635

## Space Available Sign

### MODEL

SA1286BA-02-S562/120-277VAC



### DIMENSIONS

12" H x 86" W x 5.5" D (est. 63.769 lbs)

### CLASS

Class: SA Series

**Control Method:** Communication interface with a parking system, compatible with most major equipment providers.

### CONSTRUCTION

**Back Construction:** 0.125" Aluminum sheet

**Cabinet:** Corrosion resistant, extruded aluminum frame with a hinged flush face.

5.5" deep, mitered construction. LED displays are attached using sign-in-sign construction. Moisture absorbent interior coating.

**Face Material:** 1/8" thick routed aluminum panel.

**Faces:** Single Faced Sign

**Finish:** Black

**Graphic:** Printed graphic and vinyl applied to surface

**Number of Displays:** (2)

### ELECTRICAL

**Input Voltage:** 120-277 VAC

**UL/cUL Listed:** Listed for wet locations

### MESSAGE

**Color:** Refer to message table (Printed R0, G50, B255 Blue, Printed R255, G191, B0 Yellow, White Reflective Vinyl)

**Display Type:** (67608, 67609)

**Font:** Swiss 721 Bold BT


**Sign Messages:** See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
Spaces Available Up Arrow ADA Symbol Up Arrow	White Reflective Vinyl, Printed R0, G50, B255 Blue, Printed R255, G191, B0 Yellow	3.5", 5.0", 6.125"	0.000-0.000
2-digit Seven Segment	Blue Wide Angle LED	4.5"	0.067-0.029
3-digit Seven Segment	Amber Wide Angle LED	4.5"	0.063-0.027


NOTE: Above messages are independently controlled.

# Product View


NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

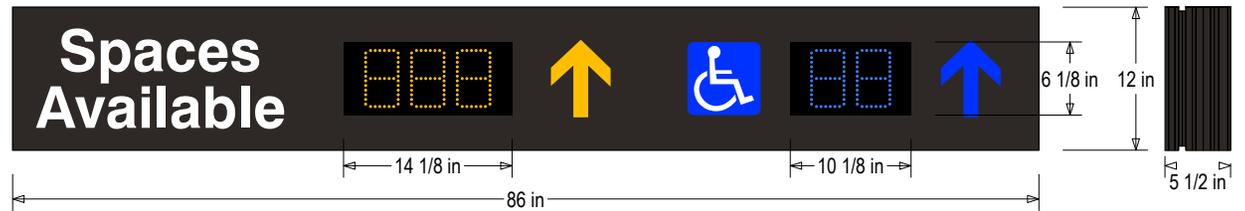

### Sample Display Options

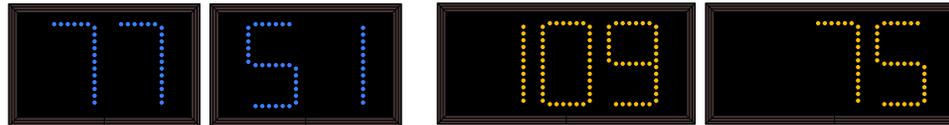

### Frame Detail

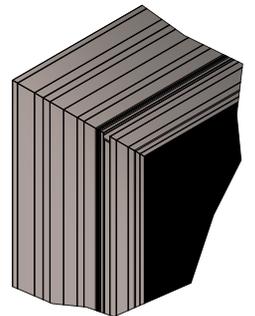

### Color Key

■ Printed R0, G50, B255 Blue ■ Printed R255, G191, B0 Yellow