

## PRODUCT ID: 68245

### DOT LED Blank-Out Sign

**MODEL**  
DOT2929RW-B360DS/100-240VAC



**DIMENSIONS**  
29" H x 29" W x 6.5" D (est. 58.393 lbs)

**CLASS**  
Class: DOT Series  
Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.

Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)

Faces: Single Faced Sign  
Finish: Powdercoat Black

#### ELECTRICAL

Input Voltage: 100-240 VAC  
Photodimming: IR photocells for auto photodimming  
Power Supplies: No Redundancy  
UL/cUL Listed: Listed for wet locations

#### MESSAGE


Illumination: Super bright direct view LEDs. Message blanks out when off.  
Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
STOP w/ Octagon	Red, White Narrow Angle LED	21.125", 5.5"	0.309-0.129

NOTE: Above messages are independently controlled.

## Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

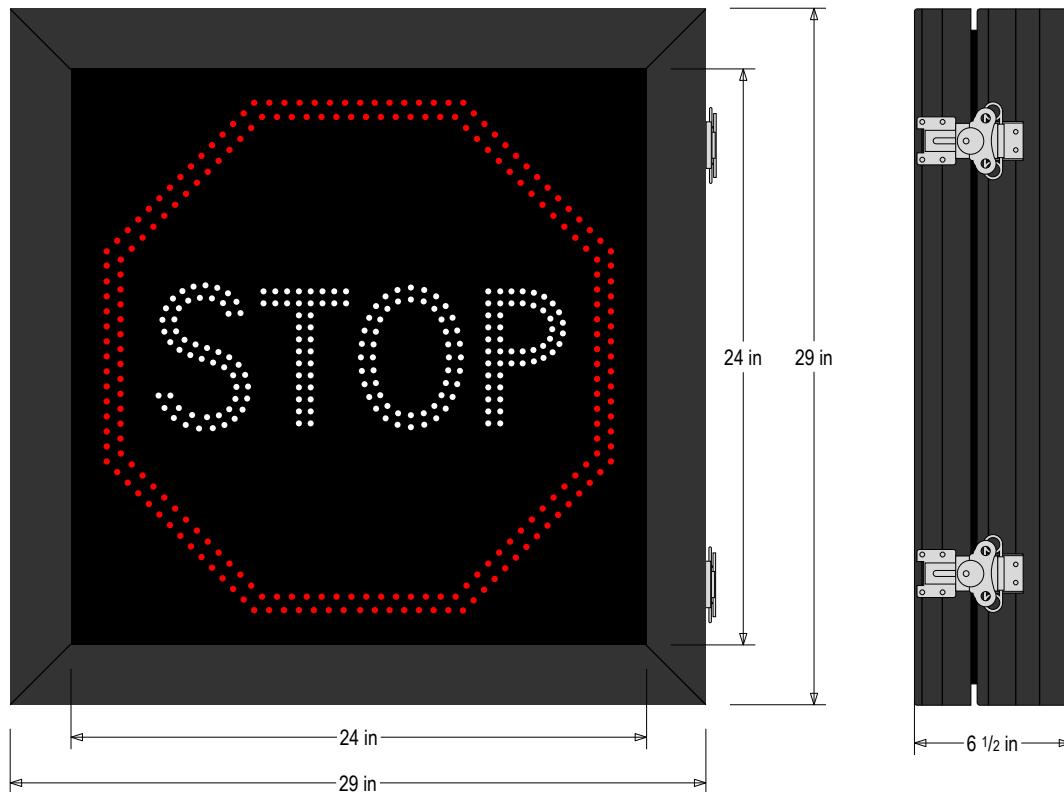

Frame Detail

