Wet Location Exit Sign
Installation Instructions

THIS INSTALL MANUAL IS APPLICABLE FOR
MODEL NO : ES-C-S-W-R-WH

SAFETY INFORMATION

IMPORTANT

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE NATIONAL ELECTRICAL CODE AND LOCAL BUILDING CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

PRECAUTIONS

- ☐ Please read and understand this entire manual before attempting to assemble, install, or operate this light fixture.
- ☐ This light fixture requires a 120VAC power source.
- ☐ Some codes require installation by a qualified electrician.
- ☐ This light fixture must be properly grounded.
- ☐ Make sure connections are secure using wire nuts, crimp-on lugs or other approved connecting devicesr.
- ☐ This light fixture should be installed indoors to a ceiling, recessed mount application

WARNING: Turn the power off at the circuit breaker or fuse. Place tape over the circuit breaker switch and verify power is off at the light fixture.

CAUTION: Burn hazard. Allow the light fixture to cool before touching.

NOTICE: If using dimming function, only connect to 0-10V approved dimming switches or control system

NOTICE: FCC Regulations state that any unauthorized changes or modifications to this equipment not expressly approved by the manufacturer could void the user's authorization to operate this equipment.

INFORMATION: The device is tested and found to comply with Part 15 of the FCC Rules. Operation is subject to two conditions: (1) This device may not cause harmful interference and, (2) this device must accept any interference received, including any interference that may cause undesired operation. These limits are designed to provide reasonable protections against harmful interference when the equipment is operated in a commercial environment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Wet Location Exit Sign
Installation Instructions

INSTALLATION

Follow the steps below to install your Wet location Exit Sign

TOOLS REQUIRED



Philips Screwdriver



Wire stripper



Drill (if mounting on a wall/ceiling)

PACKAGE CONTENTS



A



B

Part	Description	Quantity
A	EXIT emergency light	1
B	Mounting bracket and screws	1

Wet Location Exit Sign
Installation Instructions

INSTALLATION

Step 1: Mount the Light

1. Choose a visible spot for the EXIT light. Use the mounting bracket and screws to secure it.

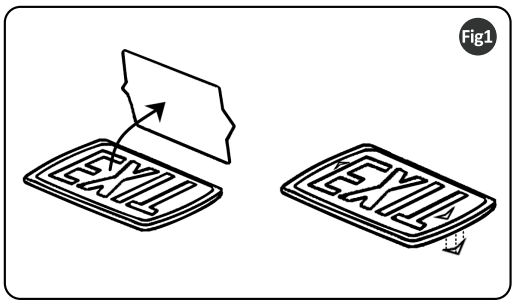

STEP 2: Connect the Wires

1. Turn off the power.
2. Open the light cover and connect:

   Black (live) to black wire
   White (neutral) to white wire
   Green/yellow to a ground if required.

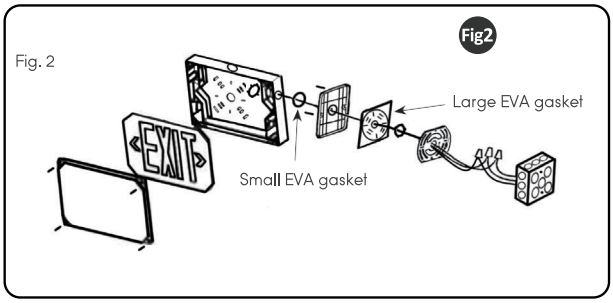

STEP 3: Install the Battery

1. Place the battery pack in the compartment and close it.

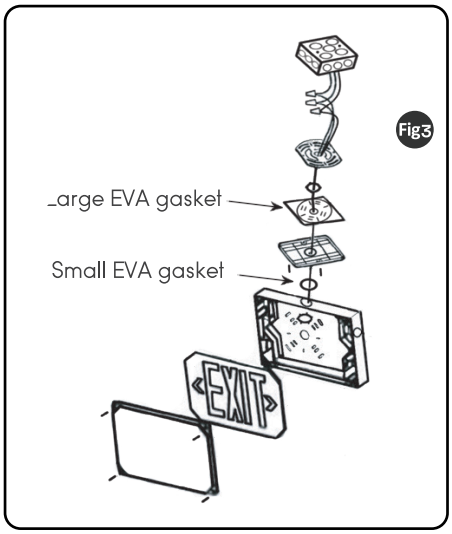

Testing:

1. Press the “TEST” button once a month to make sure it works.

2. Let the battery charge for 24 hours before testing the first time.

Troubleshooting:

1. If the light doesn’t turn on:
   Check the battery connection and make sure the wires are secure.

If it flickers:

1. Check wiring and battery charge.

Wet Location Exit Sign
Installation Instructions

INSTALLATION

Care and Maintenance

1. Cleaning: Dust the fixture periodically with a soft, dry cloth. Avoid using water or harsh cleaners on the fixture.

2. Replacement: For non-user-replaceable light sources, the LED component in this luminaire can only be replaced by the manufacturer or a certified technician.

NOTE: Turn off the electrical supply before performing any maintenance.

Additional Information

1. Model Compatibility: Ensure that your luminaire is compatible with the installation setup.

2. Troubleshooting: If the fixture does not illuminate, ensure all wiring connections are ecure and the power supply is correctly connected.

Warranty Information

This product is warranted to be free from defects in materials and workmanship for a period of five (5) years from the date of purchase. If the product fails within this period due to a defect in materials or workmanship, Manufacturer will, at its discretion, repair or replace the product free of charge. This warranty does not cover damage caused by improper installation, misuse, abuse, or modifications to the product. Normal wear and tear, incidental or consequential damages, or labor costs associated with installation or removal are not covered under this warranty. To make a claim, please retain the original purchase receipt and contact our customer service team.