

MULTICOM CLASSIC

Multi Family Intercom

- Calls up to 1000 apartments from a single SIM card (3 users per apartment).
- Visitors can scroll for residents, or enter apartment number to call.
- HD voice with VoLTE*.
- Prox reader comes as standard.
- Built in time clock for auto opening and closing of gates, barriers or doors in busy periods or for daytime operation.
- Do not disturb feature.

*Requires correct APN to be set and will only be experienced on a VoLTE enabled device.



AES PR Programmable with the AES PRO APP.

Check out our telecom website for SIM card options:

aesglobaltelecom.com



DETAILS			
Dial Out Numbers per Apartment	3 per apartment (3000 Total)	Relays	2
Keypad Codes per Apartment (6 digit)	1 per apartment (1000 Total)	Relay Type	N/C and N/O
Prox Cards/Tags per Apartment	3 per apartment (3000 Total)	Relay Load	2 amps, 24v ac max
Automatic Trigger Events per Week	10	Power Consumption	310mA on dial out, 2amp peak demand
Modem Models	4G EU, 4G USA, 4G AUS/NZ	Power Supply	24v dc (24v dc 2A adaptor included)

VISITOR CODES/CARDS			
	Permanent	Time-restricted	Temporary
Visitor Prox Cards	250	250	50
Keypad Codes (4 digits)			
Caller ID			

The Multicom Classic is available in imperial or pedestal panels. (Flush units available)

Each kit contains, a speech panel, power supply, install manual, SIM card options and a antenna. Plus card/tags for handy prox access.

Pedestal unit - Full black panel with blue lighting.

MULTI-CL-PBPK-US



Pedestal unit - Full steel panel with white lighting.

MULTI-CL-PSPK-US



Sleek all-black panel with blue lighting.

MULTI-CL-IBPK-US




Full steel panel with white lighting.

MULTI-CL-ISPK-US



MULTI-CLASSIC IMPERIAL

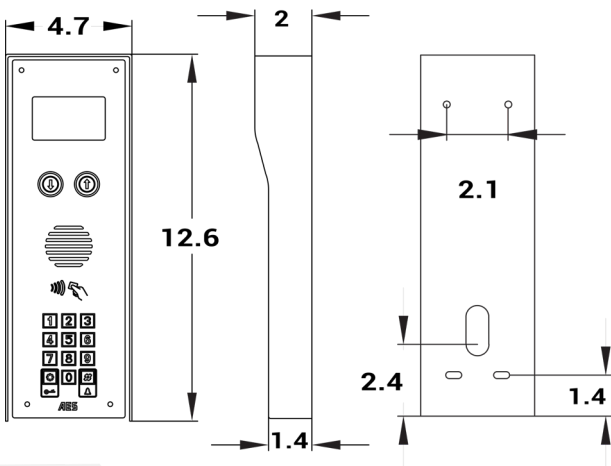

MULTI-CLASSIC PEDESTAL

