

PRODUCT ID: 61212

Space Available Sign

MODEL

S-SA5642GR-06-P628/120-277VAC



DIMENSIONS

77" H x 42" W x 5.5" D (est. 150.641 lbs)

CLASS

Class: SA Series Smart Sign

Control Method: RedStorm Sign Control and Reporting Software Comms (by others): PC or Windows server, Ethernet and static lease required

CONSTRUCTION

Back Construction: 0.125" Aluminum sheet

Cabinet: Corrosion resistant, extruded aluminum frame with a hinged face. 5.5" deep, mitered construction. LED displays are attached using sign-in-sign construction. Moisture absorbent interior coating.

Face Material: 1/8" thick routed aluminum panel.

Faces: Single Faced Sign

Finish: Duranodic Bronze

Graphic: Vinyl applied graphic

Number of Displays: (6)

ELECTRICAL

Input Voltage: 120-277 VAC

UL/cUL Listed: Listed for wet locations

MESSAGE

Color: White reflective vinyl (7812)

Display Type: 926 Green 7-Seg | Red FULL Display

Font: Swiss 721 Bold BT


Sign Messages: See message table below

| MESSAGE | LED/COLOR | HEIGHT | AMPS |
|-------------------------------|------------|------------|-------------|
| 4-digit Seven Segment w/ FULL | Green, Red | 7.5", 6.0" | 0.315-0.136 |
| 4-digit Seven Segment w/ FULL | Green, Red | 7.5", 6.0" | 0.315-0.136 |
| 4-digit Seven Segment w/ FULL | Green, Red | 7.5", 6.0" | 0.315-0.136 |
| 4-digit Seven Segment w/ FULL | Green, Red | 7.5", 6.0" | 0.315-0.136 |
| 4-digit Seven Segment w/ FULL | Green, Red | 7.5", 6.0" | 0.315-0.136 |
| 4-digit Seven Segment w/ FULL | Green, Red | 7.5", 6.0" | 0.315-0.136 |

NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

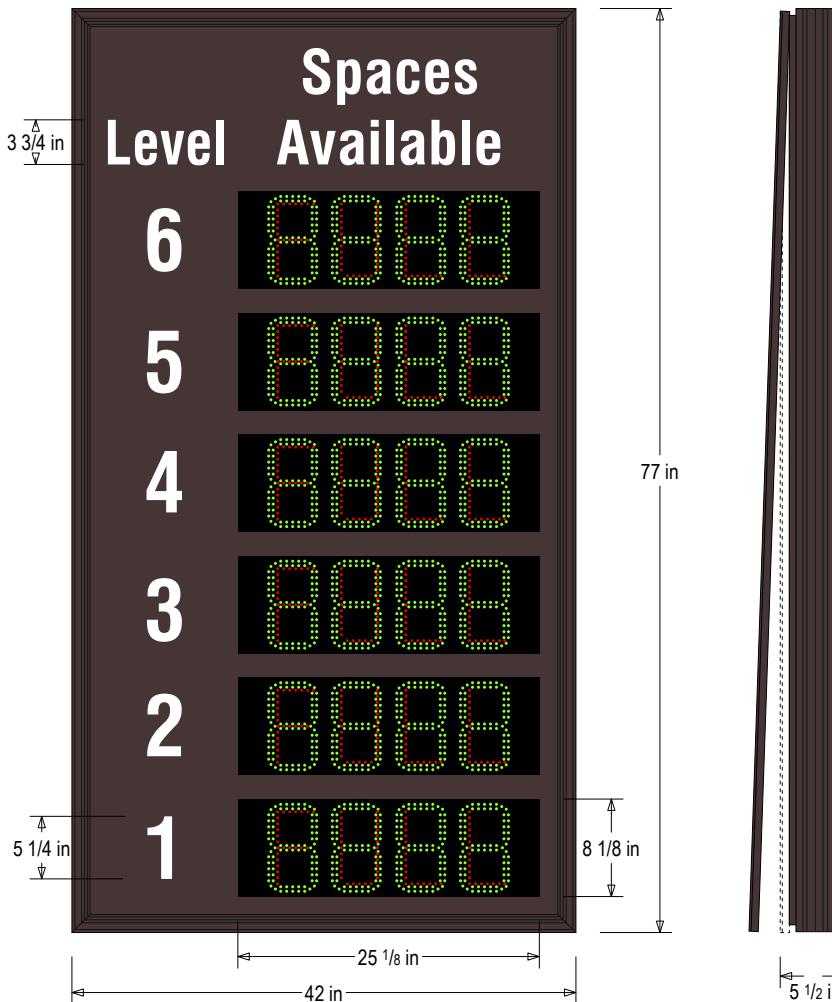

Prod. 50911,
Seven Segment
Display Functions

OPEN

CLSd

247

FULL

FULL

Frame Detail

