

**PRODUCT ID: 68095**  
**DOT LED Blank-Out Sign**

**MODEL**  
DOT3529RW-D601/9-24VDC

**DIMENSIONS**  
35" H x 29" W x 6.5" D (est. 64.109 lbs)

**CLASS**  
Class: DOT Series  
Control Method: Switch (not included) or external relay.

**CONSTRUCTION**  
Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.  
Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)  
Faces: Single Faced Sign  
Finish: Powdercoat Black

**ELECTRICAL**  
Input Voltage: 9-24 VDC  
Photodimming: IR photocells for auto photodimming  
Power Supplies: Redundant  
UL/cUL Listed: Listed for wet locations

**MESSAGE**  
Illumination: Super bright direct view LEDs. Message blanks out when off.  
Sign Messages: See message table below




MESSAGE	LED/COLOR	HEIGHT	AMPS
No Left Turn Symbol /w Train	Red, White Narrow Angle LED	21", 12.625", 6.0"	4.196-1.573

NOTE: Above messages are independently controlled.

**Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

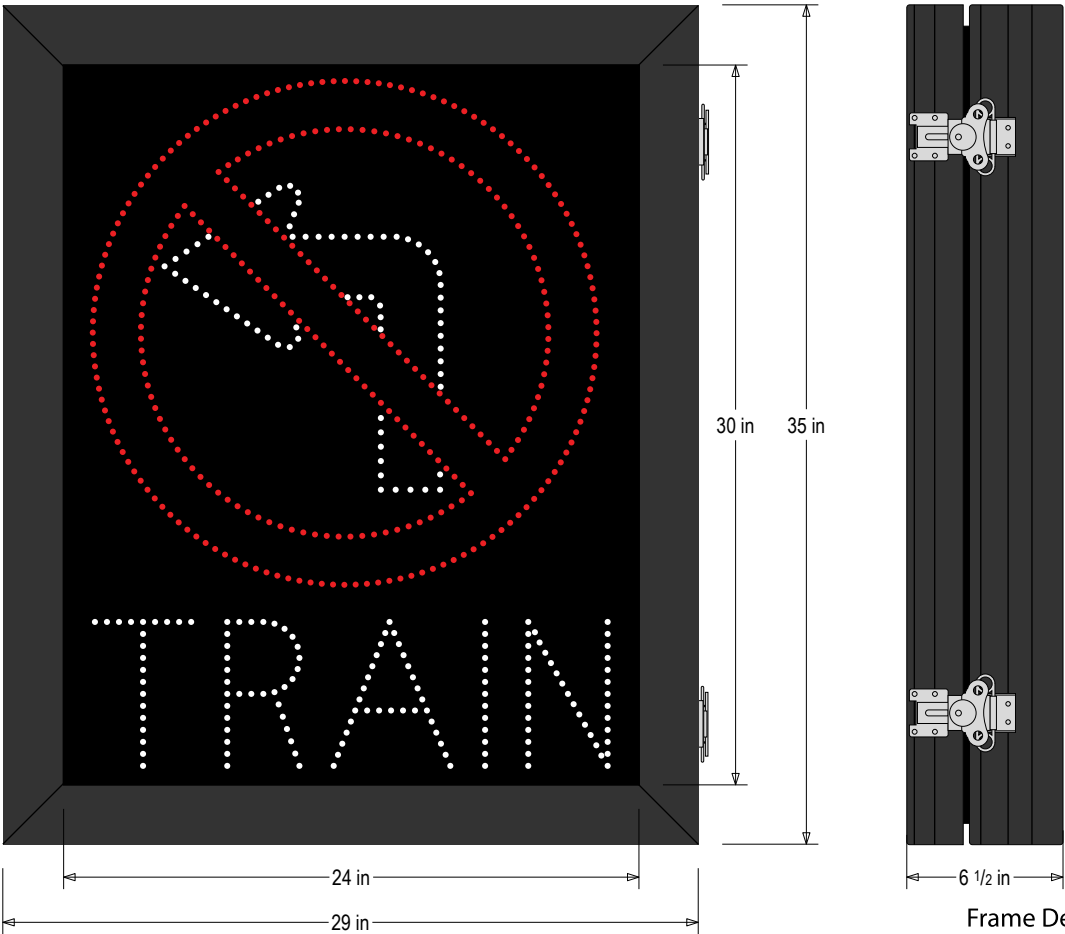

Frame Detail

