

PRODUCT ID: 68170

DOT LED Blank-Out Sign

MODEL

DOT2323RG-175/9-24VDC

DIMENSIONS

23" H x 23" W x 6.5" D (est. 43.354 lbs)

CLASS

Class: DOT Series

Control Method: Switch (not included) or external relay.



CONSTRUCTION

Cabinet: Extruded aluminum cabinet with welded seams, up to NEMA 4X rated/IP66. Hinged door with silicone gasket, tool-less stainless-steel latches. 6.5" Deep.

Face Material: 1/8" impact resistant, smoke-tinted acrylic (5109)

Faces: Single Faced Sign

Finish: Powdercoat Black

ELECTRICAL

Input Voltage: 9-24 VDC

Photodimming: IR photocells for auto photodimming

Power Supplies: Redundant

UL/cUL Listed: Listed for wet locations

MESSAGE

Illumination: Super bright direct view LEDs. Message blanks out when off.


Sign Messages: See message table below

MESSAGE	LED/COLOR	HEIGHT	AMPS
X	Red Narrow Angle LED	16.75"	2.080-0.780
Down Arrow	Green Narrow Angle LED	17.5"	2.471-0.927


NOTE: Above messages are independently controlled.

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

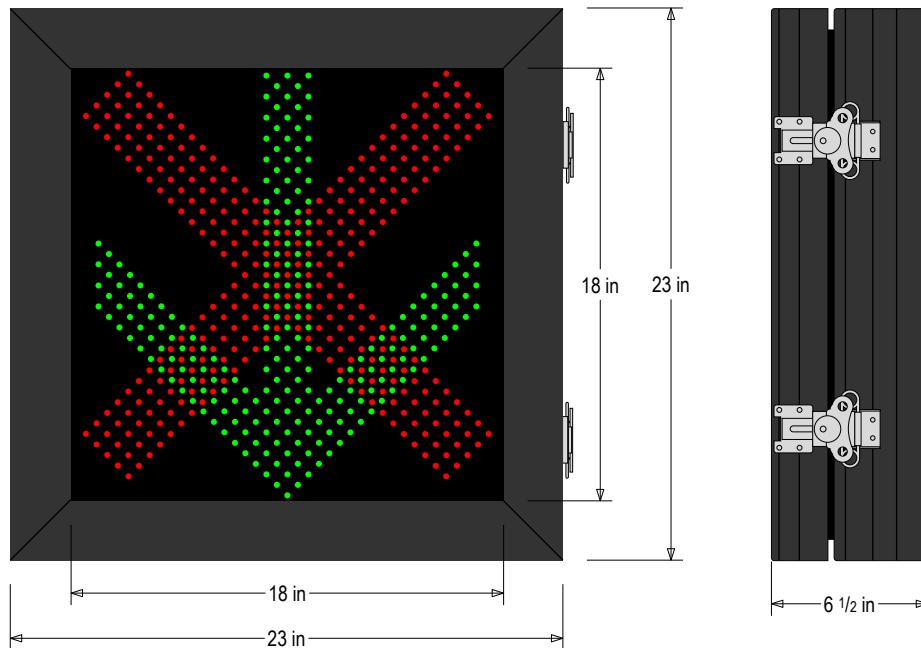

Sample Display Options

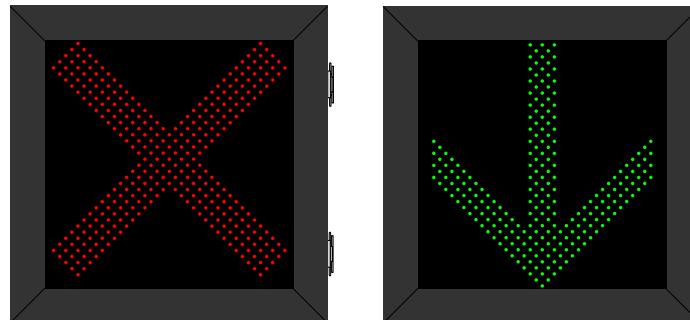

Frame Detail

